

TACAN NIP	APP CRS	Rwy Idg	8003
Chan 19	269°	TDZE	72
(108.2)		Apt Elev	80

TACAN RWY 27L

CECIL (VQQ)



▼

▲

VDP NA with Jacksonville Intl altimeter setting. Helicopter visibility reduction below ¼ SM NA. When local altimeter setting not received, use Jacksonville Intl altimeter setting and increase all MDA 60 feet, increase S-27L Cats C, D, E visibility ½ mile.

MISSED APPROACH: Climb to 700 then climbing left turn to 2100 direct NIP TACAN and continue on NIP TACAN R-150 to WUKSO/7 DME and hold.

ATIS	JACKSONVILLE APP CON	CECIL TOWER ★	GND CON	CLNC DEL	GCO
125.275	127.775 377.075	126.1 (CTAF) 235.625	121.625 226.675	123.975 254.25	135.075

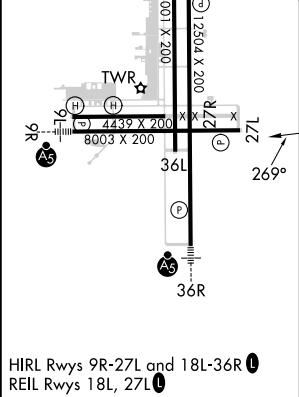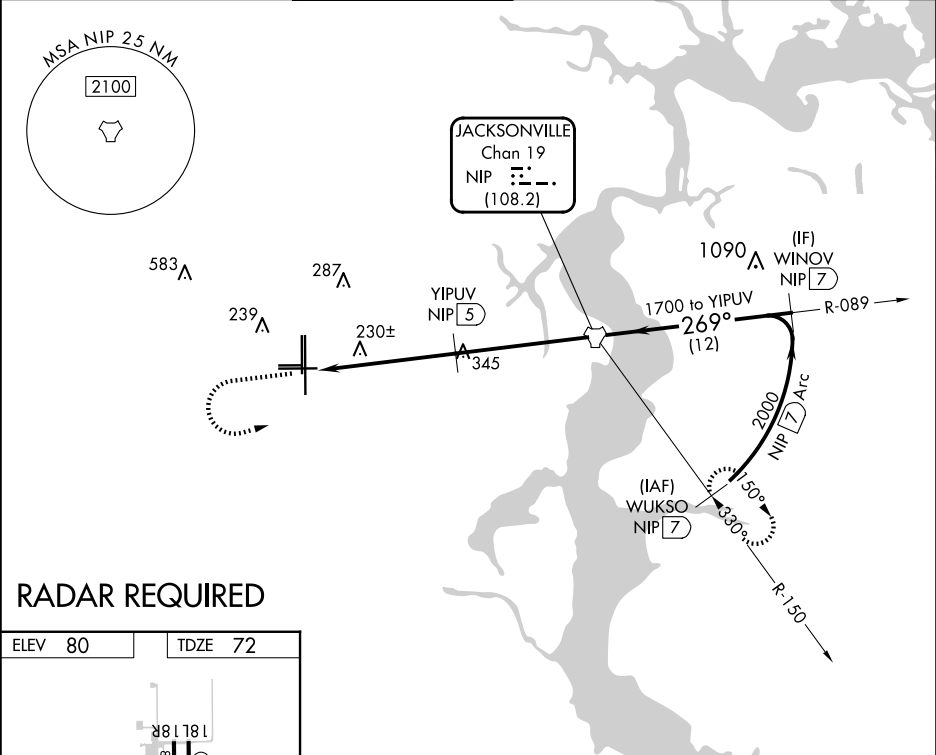

	700	2100	NIP	NIP R-150	WUKSO NIP 7	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 67).
						WINOV NIP 7
						YIPUV NIP 5
						NIP TACAN
						269° 2000
						1700
						2.97° TCH 55
						1.2 3.8 NM 5 NM 7 NM
CATEGORY	A	B	C	D	E	
S-27L	540-1	468 (500-1)	540-1½	468 (500-1½)		
CIRCLING	540-1 460 (500-1)	560-1 480 (500-1)	600-1½ 520 (600-1½)	640-2 560 (600-2)	900-3 820 (900-3)	