



WAAS CH 45838 W11A	APP CRS 109°	Rwy Idg 5400 TDZE 97 Apt Elev 97
--	------------------------	---

RNAV (GPS) RWY 11

ANIAK (ANI)(PANI)

RNP APCH.		
▼ ⚠ ❄-37°C Circling NA north of Rwy 11-29. Rwy 11 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV, LNAV/VNAV all Cats, LNAV Cat A. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 2 ½ SM.	MALSF MISSED APPROACH: Climb to 1500 then climbing right turn to 3500 direct IKUFU and hold, continue climb-in-hold to 3500.	

AWOS-3P 124.3	ANCHORAGE CENTER 118.15 251.05	CLNC DEL 118.15	CTAF 122.1
-------------------------	--	---------------------------	----------------------

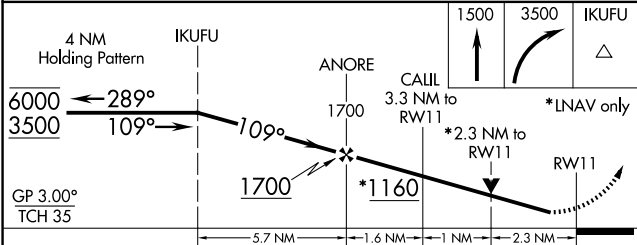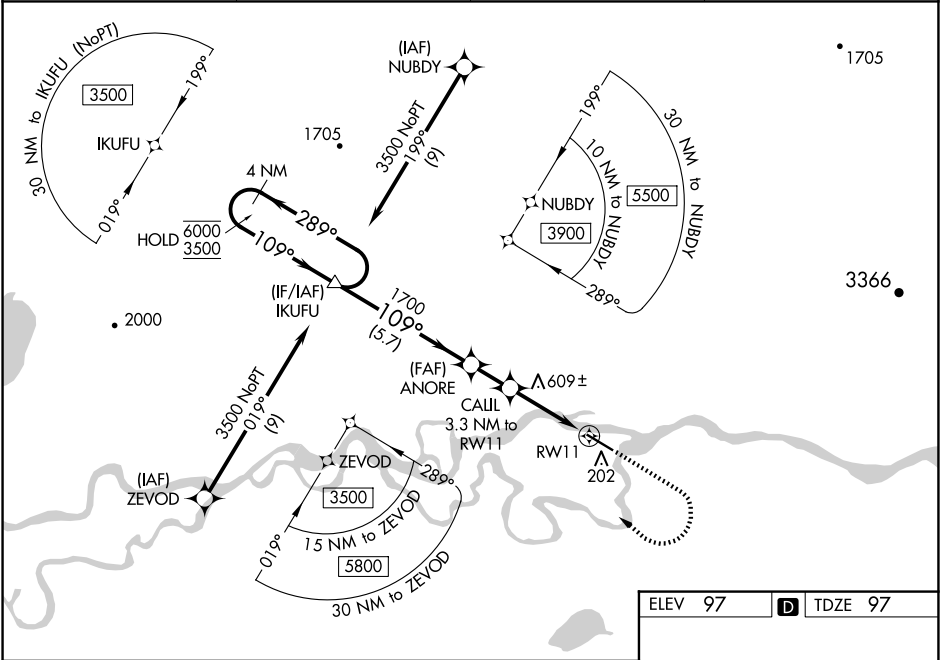

CATEGORY	A	B	C	D
LPV DA	347-1	250 (300-1)		
LNAV/VNAV DA	994-4	897 (900-4)		
LNAV MDA	860-1	763 (800-1)	860-2	763 (800-2)
CIRCLING	860-1 763 (800-1)	860-1¼ 763 (800-1¼)	860-2½ 763 (800-2½)	1200-3 1103 (1200-3)

