


APP CRS 023°	Rwy Ldg 11050 TDZE 439 Apt Elev 439
------------------------	--

RNAV (RNP) Z RWY 2L
FAIRBANKS INTL (FAI) (PAFA)

RNP AR APCH - GPS.   -29°C	For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.10* all Cats visibility to RVR 4500, increase RNP 0.10 all Cats visibility to RVR 5500, and increase RNP 0.30 all Cats visibility to RVR 6000.	ALSF-2  (A) MISSED APPROACH: Climb to 5000 on track 023° USAZY then right turn to ODIFU and track 184° to KRNNL and hold. *Missed approach requires minimum climb of 222 feet per NM to 2420.
--	---	--

ATIS 124.4	FAIRBANKS APP CON 125.35 363.2	FAIRBANKS TOWER 118.3 257.8	GND CON 121.9	CLNC DEL 127.6
----------------------	--	---------------------------------------	-------------------------	--------------------------

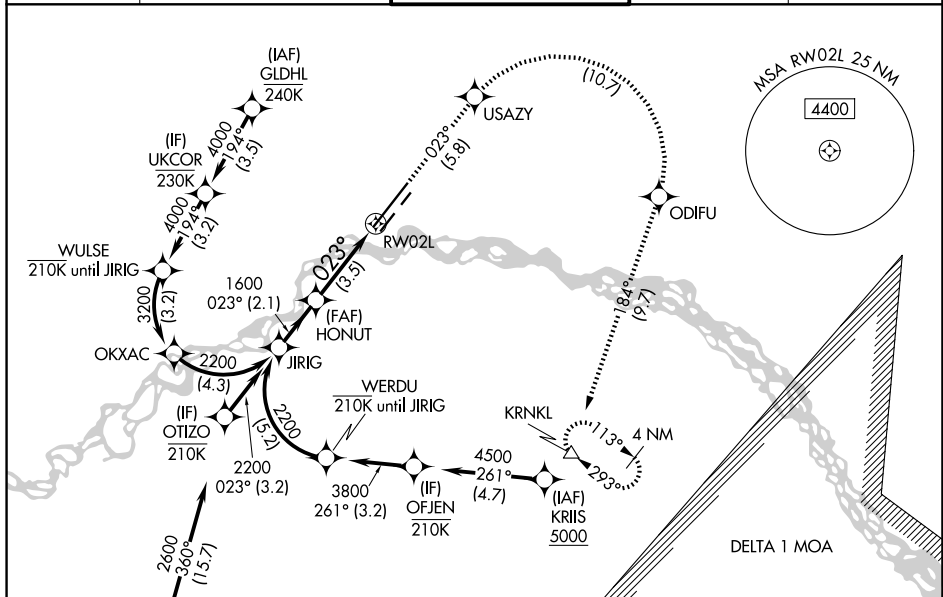

(IAF) GLOWS
5000 240K

See planview for multiple IF locations.

JIRIG HONUT RW02L

2200 023° 1600

GP 3.00°
TCH 56

2.1 NM 3.5 NM

CATEGORY A B C D

RNP 0.10 DA* 755/24 316 (400-½)

RNP 0.10 DA 805/35 366 (400-⅝)

RNP 0.30 DA 855/40 416 (500-¾)

AUTHORIZATION REQUIRED

ELEV 439 TDZE 439

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73).

USAZY ODIFU tr 184° KRKNL

TWR

REIL Rwy 20L
TDZ/CL Rwy 2L
MIRL Rwy 2R-20L
HIRL Rwy 2L-20R