

APP CRS	Rwy Ldg	10014
063°	TDZE	258
	Apt Elev	305

RNAV (RNP) Z RWY 6R

GUAM INTL (GUM)(PGUM)

RNP AR APCH - GPS.


▼

For uncompensated Baro-VNAV systems, procedure NA below 19°C or above 48°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1½ SM. Inop table does not apply to RNP 0.30.*
*Missed approach requires a minimum climb of 285 feet per NM to 1400.

MALSR

MISSED APPROACH: Climb to 3000 via track 063° to CIBOL and hold.

ATIS	GUAM CERAP	AGANA TOWER	GND CON	CLNC DEL
119.0	119.8 269.0	118.1 340.2	121.9 336.4	121.9

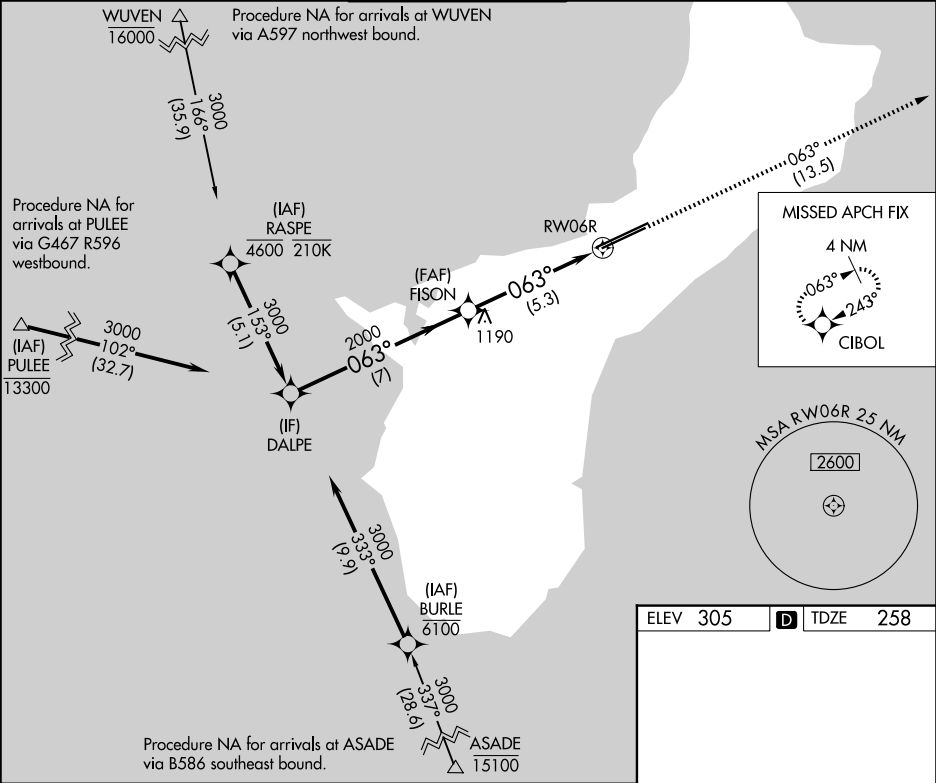

Procedure Turn NA

DALPE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).

3000

CIBOL

GP 3.00° TCH 55

7 NM

5.3 NM

3000

2000

063°

tr 063°

0.5% UP

0.7% DOWN

12014 X 150

0.8% UP

0.6% DOWN

TWR

063°

HIRL all Rwys

CATEGORY	A	B	C	D
RNP 0.30* DA	511-¾		253 (300-¾)	
RNP 0.30 DA	656-¾		398 (400-¾)	

AUTHORIZATION REQUIRED