

RNAV (GPS) RWY 11

APCH CRS	Rwy Idg
105°	8000
TDZE	318
Arpt Elev	322

[USN]


GOLIAD NOLF (KNGT)

RNP APCH

MISSED APPROACH: Climb to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.

When local altimeter setting not received, use Beeville Muni altimeter setting.

ASOS 353.675	CTAF 132.875 307.075
-----------------	-------------------------

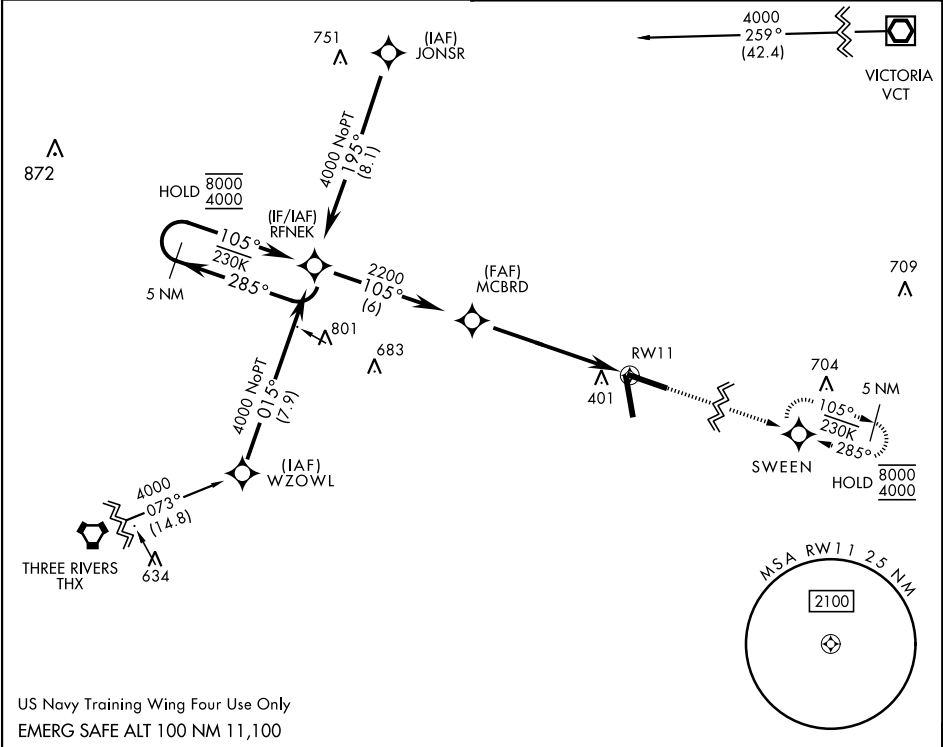

US Navy Training Wing Four Use Only

EMERG SAFE ALT 100 NM 11,100


VDP NA with Beeville Muni altimeter setting.

4000


SWEEN

ELEV 322

TDZE 318

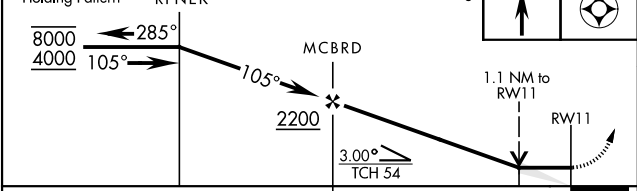

CATEGORY	A	B	C	D
RNAV MDA	720-1 402 (400-1)	720-1 402 (400-1)	720-1 402 (400-1)	720-1 402 (400-1)
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1 498 (500-1)	880-2 558 (600-2)
BEEVILLE MUNI ALTIMETER SETTING MINIMA				
RNAV MDA	760-1 442 (500-1)	760-1 442 (500-1)	760-1 442 (500-1)	760-1 442 (500-1)
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1 498 (500-1)	880-2 558 (600-2)

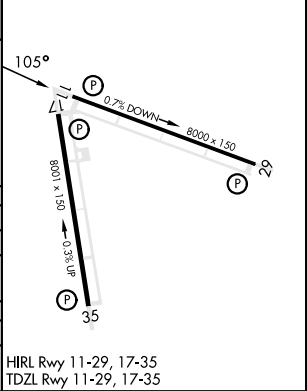

RNAV (GPS) RWY 11

SC-3, 04 SEP 2025 to 02 OCT 2025

SC-3, 04 SEP 2025 to 02 OCT 2025