


RNAV (GPS) RWY 29

APCH CRS	Rwy Idg
285°	8000
TDZE	285
Arprt Elev	322

[USN]

GOLIAD NOLF (KNGT)

RNP APCH	MISSED APPROACH: Climb to 900 then climbing right turn to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.
When local altimeter setting not received, use Beeville Muni altimeter setting.	
ASOS 353.675	CTAF 132.875 307.075

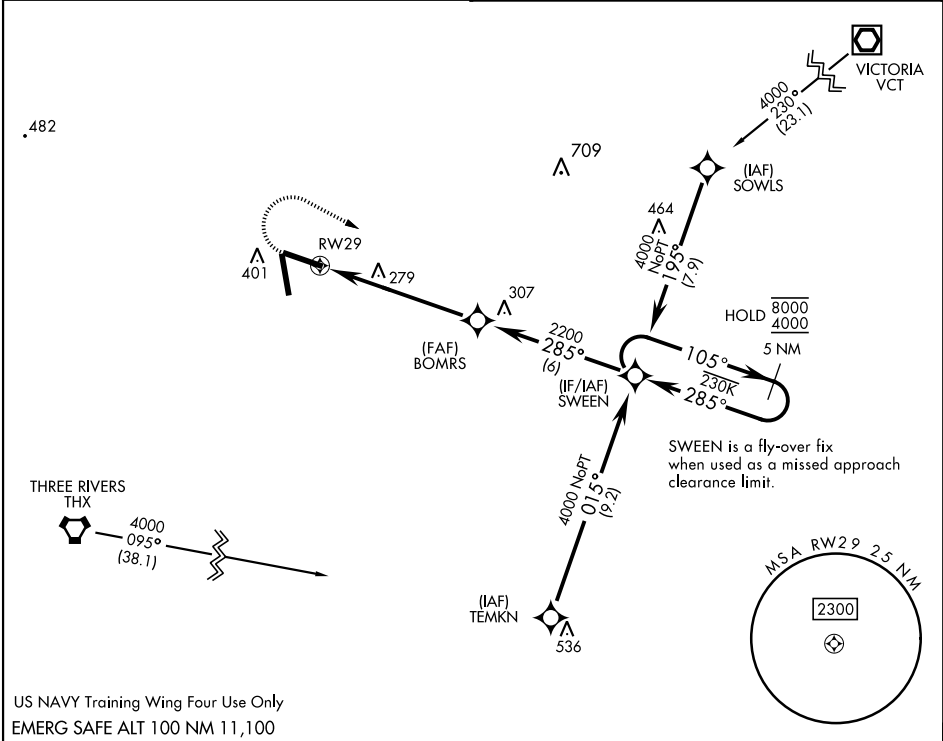

900	4000	SWEEN	VDP NA with Beeville Muni altimeter setting.	SWEEN 5 NM Holding Pattern	ELEV 322	TDZE 285
CATEGORY	A	B	C	D		
LNAV MDA	580-1 295 (300-1)					
CIRCLING	760-1 438 (500-1)	780-1 458 (500-1)	780-1½ 458 (500-1½)	880-2 558 (600-2)		
BEEVILLE MUNI ALTIMETER SETTING MINIMA						
LNAV MDA	640-1 355 (400-1)					
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1½ 498 (500-1½)	880-2 558 (600-2)		
					HIRL Rwy 11-29, 17-35 TDZL Rwy 11, 29, 17, 35	

RNAV (GPS) RWY 29