

GND CON

127.25 335.5

SILVERBOW TOWER ★

124.75 257.95

NELLIS CONTROL


119.35 254.4

SHL-3188 [USAF]

Rwy	Knots	60	120	180	240	300	360
14 ⓐ	V/V(fpm)	300	600	900	1200	1500	1800
32 ⓑ	V/V(fpm)	265	530	795	1060	1325	1590

Minimum Climb Rate

- ⓐ to 10,700
- ⓑ to 5900

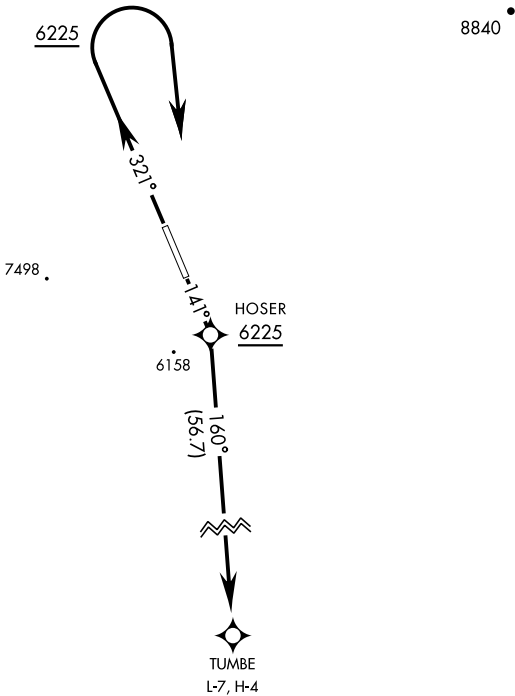

GPS REQUIRED

For use by E/F/G and R (RNP 2.0)
equipped A/C only.

DEPARTURE ROUTE DESCRIPTION

TAKE-OFF RWY 14: Fly heading 141°, at 6225 (HOSER) turn right direct TUMBE.

TAKE-OFF RWY 32: Fly heading 321°, at 6225 turn right direct TUMBE.