


ILS or LOC RWY 20
ROGERS EXEC - CARTER FLD (ROG)

MISSED APPROACH: Climb to 2100 then climbing left turn to 4000 on heading 110° and RZC VORTAC R-048 to TEEUP/RZC VORTAC 12.6 DME and hold.

T Autopilot coupled approach NA below 1632.

AWOS-3PT 134.375	RAZORBACK APP CON ★ 126.6 305.2	ROGERS TOWER ★ 119.375 (CTAF) 0	GND CON 118.0	CLNC DEL 121.75	CLNC DEL 121.75 (When twr dosed)
----------------------------	---	--	-------------------------	---------------------------	---

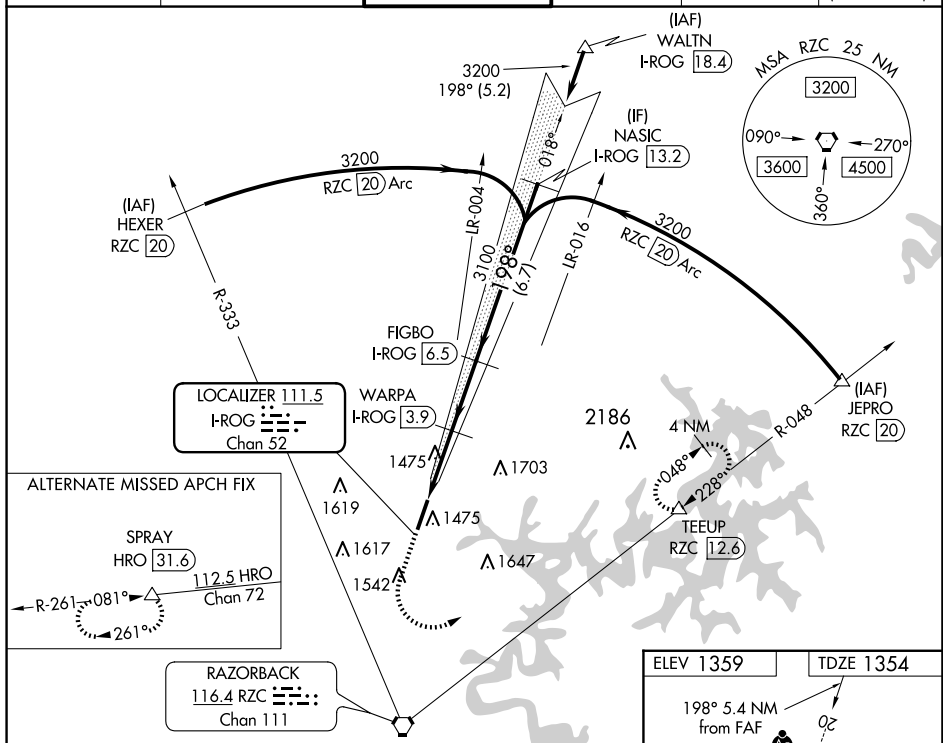


2100 ↑	4000 hdg 110°	RZC R-048	TEEUP △
-----------	---------------------	--------------	------------

Use I-ROG DME when on LOC course.

Diagram illustrating a flight path with various navigation aids and distances:

- Initial heading: 2100 (up arrow)
- Heading change: 4000 (hdg 110°)
- Navigation aid: RZC R-048
- Navigation aid: TEEUP (triangle symbol)
- Use I-ROG DME when on LOC course.
- Path segments and distances:
 - 1.1 NM to I-ROG 1.2
 - 1.6 NM to WARPA 3.9
 - 2.7 NM to FIGBO 6.5
 - 6.7 NM to NASIC 13.2
- Bearing: 198°
- Altitude: 3100
- Altitude: 3200
- GS 3.00° TCH 55

CATEGORY	A	B	C	D
S-ILS 20	1554-½ 200 (200-½)			
S-LOC 20	1740-½ 386 (400-½)		1740-⅝ 386 (400-⅝)	
C CIRCLING	1840-1 481 (500-1)		2020-1¾ 661 (700-1¾)	2020-2 661 (700-2)

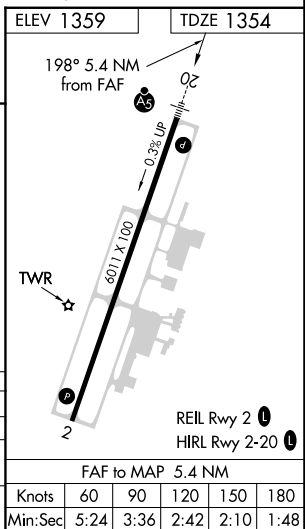

SC-1. 04 SEP 2025 to 02 OCT 2025