

LOC I-FKL 110.5	APP CRS 207°	Rwy ldg TDZE 5200 Apt Elev 1540	ILS or LOC RWY 21 VENANGO RGNL (F'KL)
---------------------------	------------------------	---	--

RADAR required to define DACCA.
RADAR required for procedure entry.

T

A


For inop ALS, increase S-LOC 21 Cat C/D visibility to 1 SM.
Circling Rwy 12 NA at night.

MALSR

AS

MISSED APPROACH: Climb to 2200 then climbing right turn to 3400 direct FKL VOR and hold, continue climb-in-hold to 3400.

AWOS-3PT 118.175	YOUNGSTOWN APP CON ★ 126.25 322.3	CLNC DEL 126.25	UNICOM 122.7 (CTAF) 0
----------------------------	---	---------------------------	---------------------------------

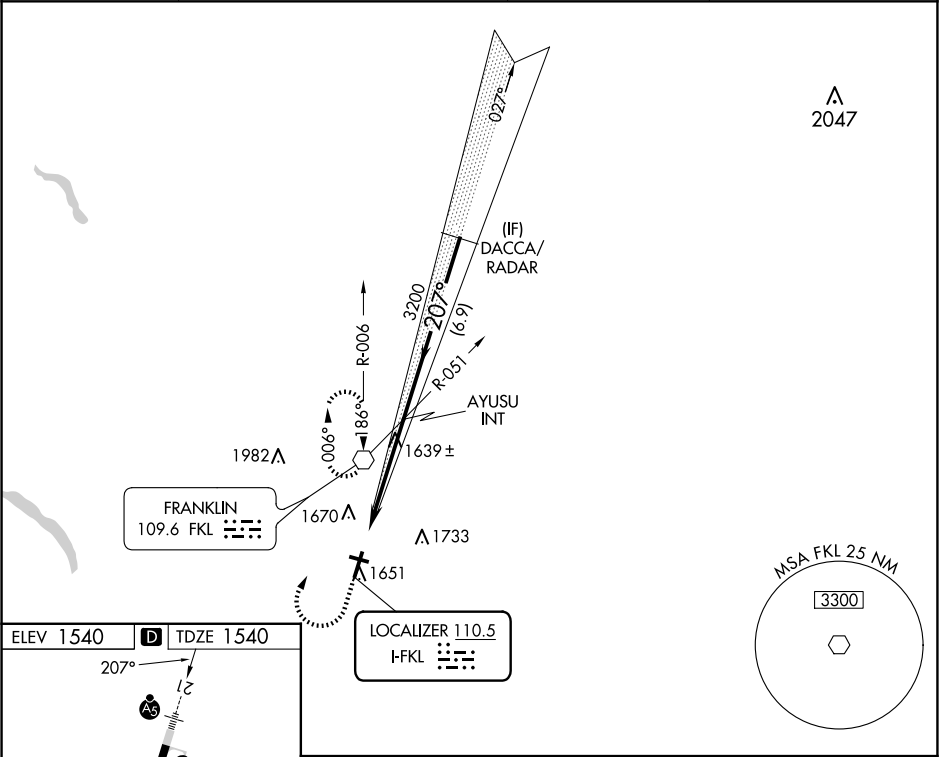

ELEV 1540 D TDZE 1540

207°

1596

3593 X 100

5200 X 150

3

MIRL Rwy 12-30 0

HIRL Rwy 3-21 0

FAF to MAP 5 NM

Knots

60

90

120

150

180

Min:Sec

5:00

3:20

2:30

2:00

1:40

2200

3400

FKL

AYUSU INT

3200

3400

207°

GS 3.00°

TCH 55

CATEGORY

A

B

C

D

S-ILS-21

1740-½

200 (200-½)

S-LOC-21

1900-½

360 (400-½)

1900-⅝

360 (400-⅝)

CIRCLING

1960-1

420 (500-1)

2000-1

460 (500-1)

2040-1½

500 (500-1½)

2100-2

560 (600-2)

NE-4, 04 SEP 2025 to 02 OCT 2025

NE-4, 04 SEP 2025 to 02 OCT 2025