


WAAS CH 53537 W21A	APP CRS 205°	Rwy Ldg TDZE 935 Apt Elev 937
--	------------------------	---

RNAV (GPS) RWY 21
DELAWARE COUNTY RGNL (MIE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Wayne Intl altimeter setting and increase all DA 121 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility ¾ mile and LNAV/VNAV all Cats and Circling Cats C/D visibility ½ mile. Baro-VNAV and VDP NA when using Fort Wayne Intl altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2800 direct
APPAL and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

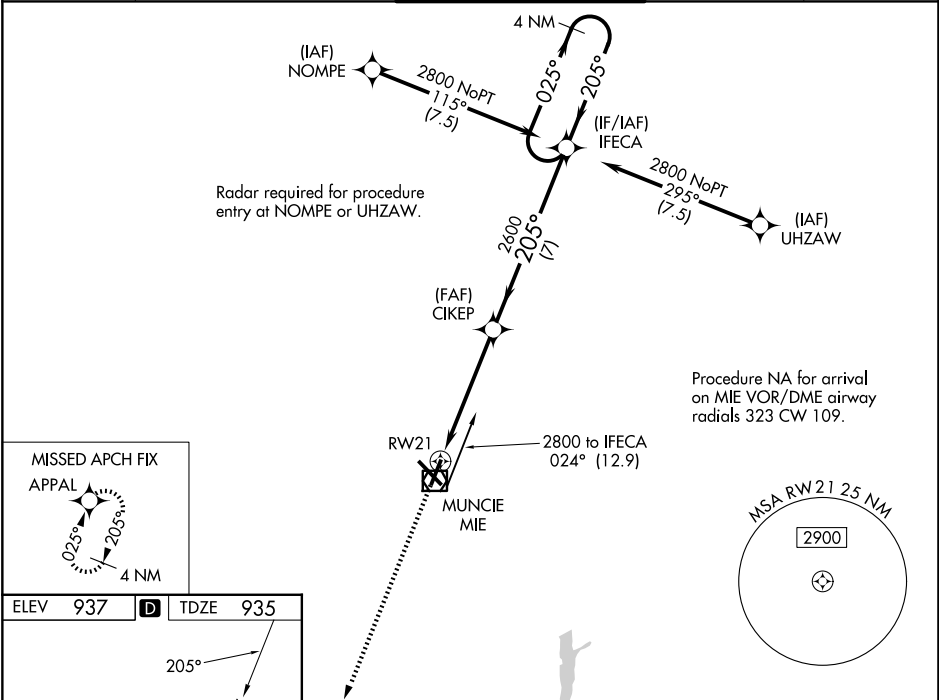

ELEV 937	D	TDZE 935
HIRL Rwy 14-32 L MIRL Rwy 3-21 L REIL Rwy 3, 14 and 21 L		

2800	APPAL	*LNAV only
CATEGORY		
LPV	DA	1195-7/8 260 (300-%)
LNAV/VNAV	DA	1351-13/8 416 (500-1%)
LNAV	MDA	1400-1 465 (500-1) 1400-13/8 465 (500-1%)
CIRCLING	1460-1 523 (600-1)	1500-11/2 563 (600-11/2) 1600-2 663 (700-2)