

MUNCIE, INDIANA

AL-5011 (FAA)

25219

WAAS CH 78237 W03A	APP CRS 025°	Rwy Ldg 5197 TDZE 937 Apt Elev 937
--	------------------------	---





RNAV (GPS) RWY 3
DELAWARE COUNTY RGNL (MIE)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Wayne Int'l altimeter setting and increase all DA 121 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cats C/D visibility $\frac{3}{8}$ mile, LNAV/VNAV all Cats visibility $\frac{7}{8}$ mile and Circling Cats C/D visibility $\frac{1}{2}$ mile. Baro-VNAV NA when using Fort Wayne Int'l altimeter setting. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 2800 direct
IFECA and hold.

ATIS 133.25	INDIANAPOLIS APP CON 120.65 317.8	MUNCIE TOWER ★ 120.1 (CTAF) 0	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

RADAR REQUIRED

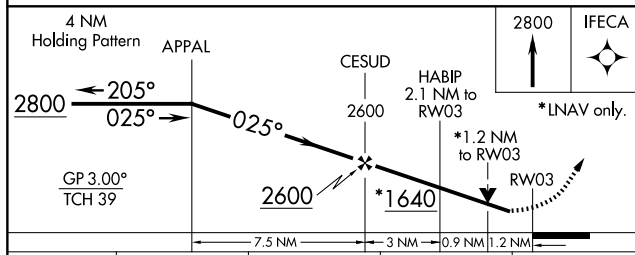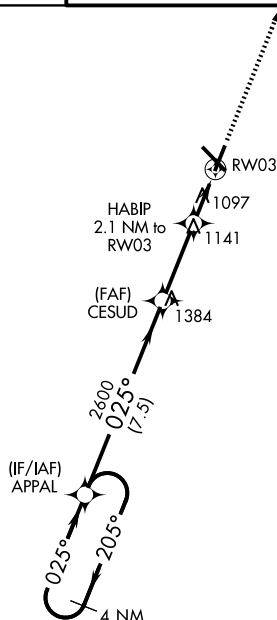

CATEGORY	A	B	C	D
LPV DA	1 190-7/8 253 (300-7/8)			
LNAV/ VNAV DA	1 412-15/8 475 (500-15/8)			
LNAV MDA	1 360-1	423 (500-1)	1 360-1 1/4	423 (500-1 1/4)
CIRCLING	1 460-1	523 (600-1)	1 500-1 1/2 563 (600-1 1/2)	1 600-2 663 (700-2)

MUNCIE, INDIANA
Orig 05MAR15

40°15'N-85°24'W

DELAWARE COUNTY RGRL (MIE)
RNAV (GPS) RWY 3