

WAAS CH 99341 W21A	APP CRS 214°	Rwy Idg 7000 TDZE 7003 Apt Elev 7014
--	------------------------	---



RNAV (GPS) RWY 21
FLAGSTAFF PULLIAM (FLG)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below
A -19 °C (2°F) or above 44°C (111°F). DME/DME RNP-0.3 NA.
 For inop ALS, increase LPV all Cats visibility to $\frac{7}{8}$ SM.



MISSED APPROACH: Climb to 7500 then climbing left turn to 10800 direct HOXOL and hold.

ATIS 125.8	PHOENIX APP CON 126.375 236.775	FLAGSTAFF TOWER ★ 134.55 (CTAF) 0 239.25	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

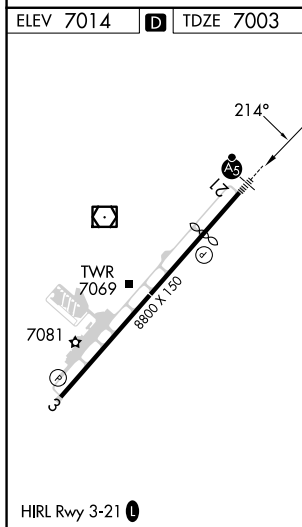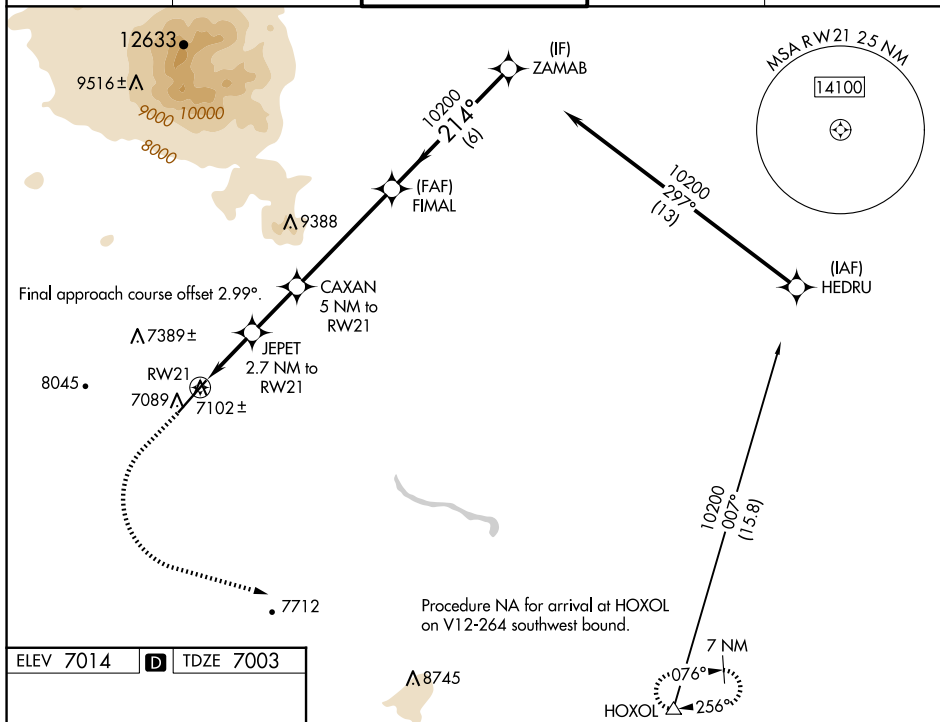

7500 ↑	10800 ↖	HOXOL △				
*LNAV only						
RW21			JEPET 2.7 NM to RW21	CAXAN 5 NM to RW21	FINAL 10200	ZAMAB
*1 NM to RW21			1.7 NM	2.3 NM	4.9 NM	6 NM
7900*			8640*		214° 10200	
			GP 3.00° TCH 52			
CATEGORY		A		B	C	D
LPV	DA	7258-½		255 (300-½)		
LNAV/ VNAV	DA	7319-⅝		316 (400-⅝)		
LNAV	MDA	7360-½ 357 (400-½)		7360-⅝ 357 (400-⅝)		
CIRCLING	7520-1 506 (600-1)	7560-1 546 (600-1)		8100-3 1086 (1100-3)		8560-3 1546 (1600-3)