

WAAS CH 60900 W36A	APP CRS 004°	Rwy Idg 7000 TDZE 62 Apt Elev 83
--	------------------------	---

RNAV (GPS) RWY 36

TALLAHASSEE INTL (TLH)

RNP APCH - GPS.



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.
▲ For inop ALS, increase LNAV/VNAV all Cts visibility to RVR 4500.

MALSR

MISSED APPROACH: Climb to 3000 direct CIGAY and hold, continue climb-in-hold to 3000.

ASR * RVR 1800 authorized with use of FD or AP or HUD to DA.

ATIS 119.45 239.25	TALLAHASSEE APP CON * 135.8 317.4	TALLAHASSEE TOWER * 118.7 (CTAF) 257.8	GND CON 121.9 348.6	CLNC DEL 126.65 275.8	UNICOM 123.075
------------------------------	---	--	-------------------------------	---------------------------------	--------------------------

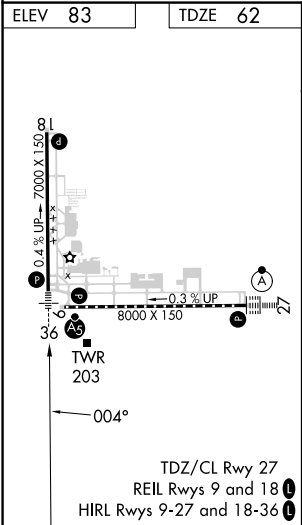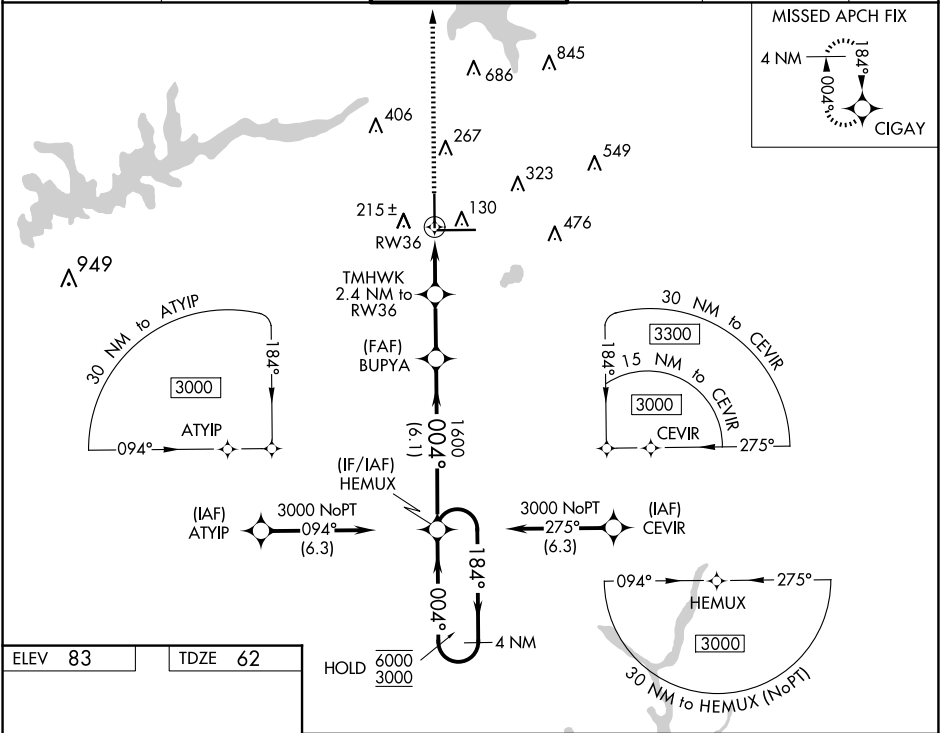

3000

CIGAY

4 NM Holding Pattern

HEMUX

184° → 6000

← 004° 3000

TMHWK

2.4 NM to RW36

BUPYA

1600

HEMUX

004°

1.1 NM to RW36

1.1 NM

1.3 NM

2.3 NM

6.1 NM

880

1600

GP 3.00° TCH 54

CATEGORY	A		B	C	D
LPV DA *			262/24	200 (200-½)	
LNAV/VNAV DA			364/24	302 (300-½)	
LNAV MDA	460/24	398 (400-½)	460/35	398 (400-½)	
CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-½)	800-2¼ 717 (800-2¼)	