

ATIS 125.025  
CLNC DEL 118  
GND CON 12  
PONTIAC TOW  
120.5 (CTAF)

## TAKEOFF MINIMUMS

Rwys 18, 36: NA - Environmental.  
Rwys 9L/R, 27L/R: Standard.

RADAR required. DME required.

**TOP ALTITUDE:**  
**3000**

NOTE: For use by non-RNAV equipped aircraft only.  
NOTE: When using this departure, file the appropriate depicted departure fix and route. Aircraft over HARWL must file FL220 and below. Aircraft landing Cleveland (CLE) must file MAARS transition. Turbojet departures at/above 10000, maintain 280K until advised by ATC. If unable, advise ATC prior to departure.


**SPECIAL INSTRUCTIONS:**

For appropriate departure control frequency, see graphic.  
Use frequency depicted within the sector where first  
navaid/fix for your route is located (sectors indicated by  
dashed lines; frequencies in dashed box within).

(CONTINUED ON FOLLOWING PAGE)

EC-1, 04 SEP 2025 to 02 OCT 2025

NOTE: Chart not to scale.

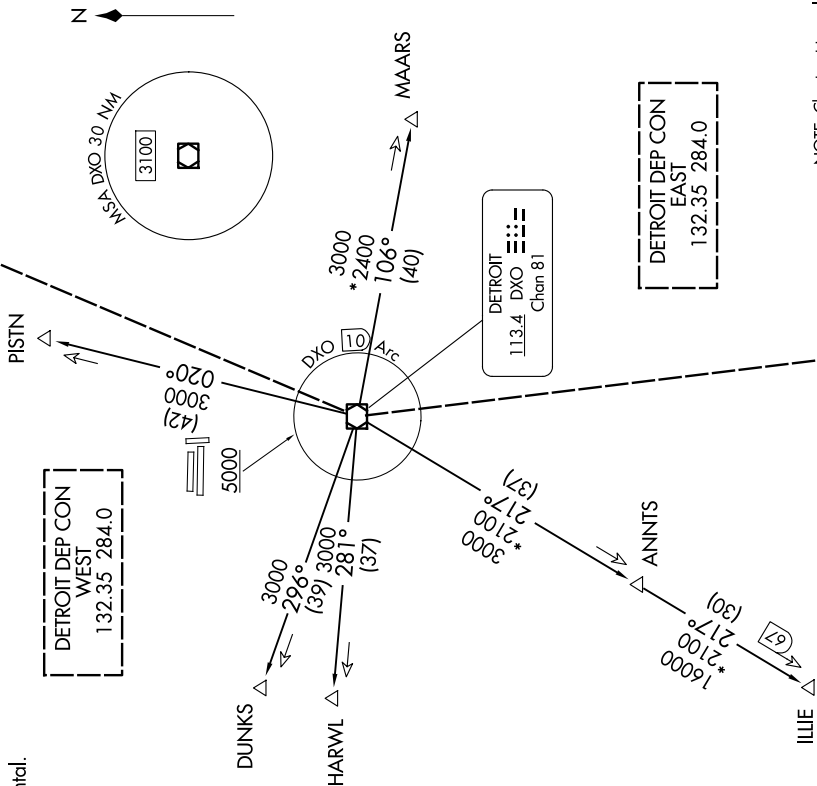

## METRO FOUR DEPARTURE

(METRO4.DXO) 05SEP24

PONTIAC, MICHIGAN

OAKLAND COUNTY INTL (PTK)