

WAAS CH 93641 W17A	APP CRS 167°	Rwy Idg TDZE Apt Elev	8002 2164 2164
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 17

ASHEVILLE RGNL (AVL)

RNP APCH.

▼

▲


Circling NA west of Rwy 17-35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 2½ SM and increase LNAV Cats C/D visibility to 2 SM.

MALSR


AS

MISSED APPROACH: Climb to 6200 direct AVEBE and hold, continue climb-in-hold to 6200.

ATIS 120.2	ASHEVILLE APP CON* 124.65 351.8	ASHEVILLE TOWER* 121.1 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

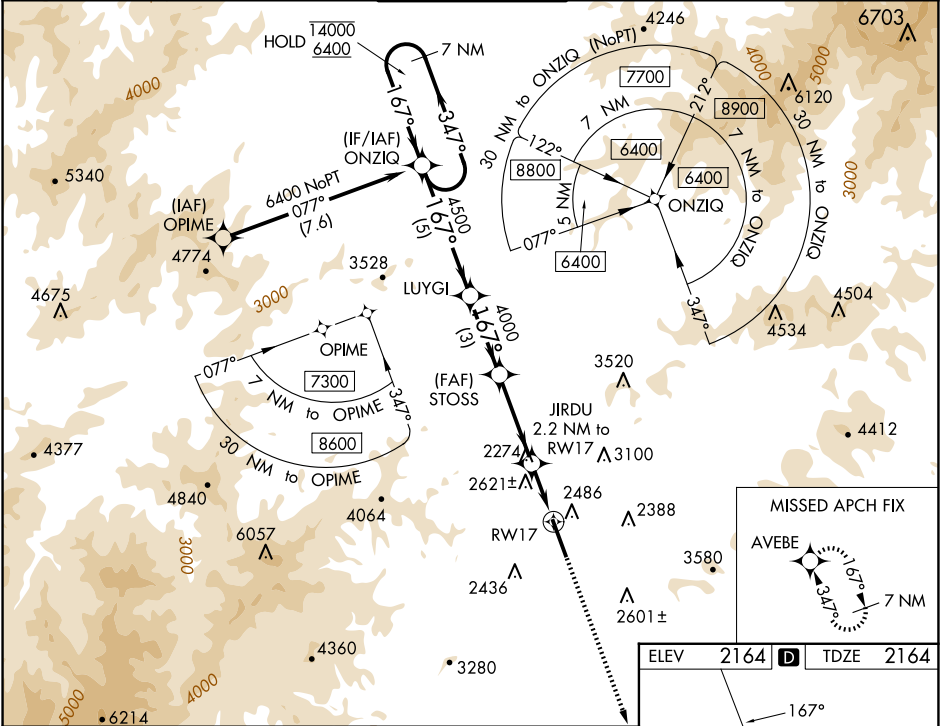

7 NM Holding Pattern		ONZIQ		LUYGI		STOSS		JIRDU 2.2 NM to RW17		*LNAV only.	
14000 6400		347° 167°		167°		4500		4000		*2920	
GP 3.00° TCH 55											
		5 NM		3 NM		3.4 NM		2.2 NM			
CATEGORY		A		B		C		D			
LPV DA		2364-½		200 (200-½)							
LNAV/VNAV DA		2960-1¾		796 (800-1¾)							
LNAV MDA		2880-½ 716 (800-½)		2880-1⅝ 716 (800-1⅝)							
CIRCLING		2880-1 716 (800-1)		3460-3 1296 (1300-3)		3720-3 1556 (1600-3)					

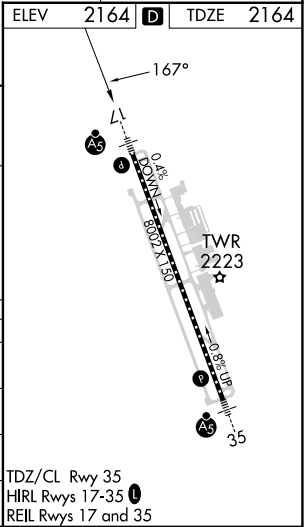

SE-2, 04 SEP 2025 to 02 OCT 2025

SE-2, 04 SEP 2025 to 02 OCT 2025