

|                                                 |                        |                                                               |
|-------------------------------------------------|------------------------|---------------------------------------------------------------|
| LOC/DME I-MKL<br><b>109.1</b><br>Chan <b>28</b> | APP CRS<br><b>023°</b> | Rwy Ldg <b>6005</b><br>TDZE <b>433</b><br>Apt Elev <b>433</b> |
|-------------------------------------------------|------------------------|---------------------------------------------------------------|

ILS or LOC RWY 2  
JACKSON RGNL (MKL)





DME required. RADAR required for procedure entry.



MISSED APPROACH: Climb to 1000 then climbing left turn to 2200 on heading 230° and MKL VOR/DME R-254 to SKOAL/MKL 12 DME and hold.

▼ Rwy 2 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase S-LOC 2 Cat A/B visibility to 1 SM and Cat C/D visibility 1½ SM.  
▲

|                        |                                        |                                                  |                         |                         |
|------------------------|----------------------------------------|--------------------------------------------------|-------------------------|-------------------------|
| ASOS<br><b>119.325</b> | MEMPHIS CENTER<br><b>134.65 316.15</b> | JACKSON TOWER ★<br><b>127.15 (CTAF) 0 249.95</b> | GND CON<br><b>120.9</b> | UNICOM<br><b>122.95</b> |
|------------------------|----------------------------------------|--------------------------------------------------|-------------------------|-------------------------|

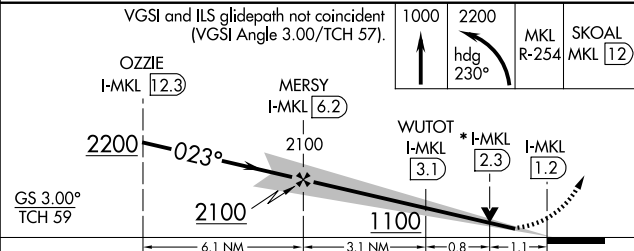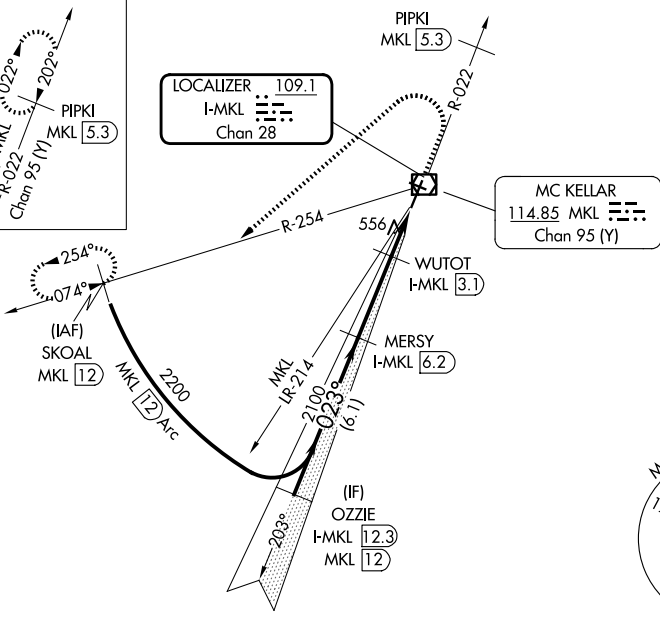

| CATEGORY | A                    | B                    | C                      | D                     |
|----------|----------------------|----------------------|------------------------|-----------------------|
| S-ILS 2  |                      | 770-¾                | 337 (400-¾)            |                       |
| S-LOC 2  |                      | 820-¾                | 387 (400-¾)            |                       |
| CIRCLING | 900-1<br>467 (500-1) | 920-1<br>487 (500-1) | 960-1½<br>527 (600-1½) | 1100-2<br>667 (700-2) |

