

WAAS CH 40312 W20A	APP CRS 203°	Rwy Ldg 6005 TDZE 418 Apt Elev 433
--	------------------------	---

RNAV (GPS) RWY 20

JACKSON RGNL (MKL)

RNP APCH - GPS


▼

Rwy 20 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Baro-VNAV NA when using Dyersburg altimeter setting. When local altimeter setting not received, use Dyersburg altimeter setting: increase LPV DA to 802 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 910 feet and visibility all Cats ¼ SM; increase all MDA 100 feet and visibility LNAV Cat C and D and Circling Cat C ¼ SM, and Circling Cat D ½ SM.

▲

MISSED APPROACH: Climb to 3000 direct ZIFFO and hold.

ASOS 119.325	MEMPHIS CENTER 134.65 316.15	JACKSON TOWER ★ 127.15 (CTAF) 0 249.95	GND CON 120.9	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

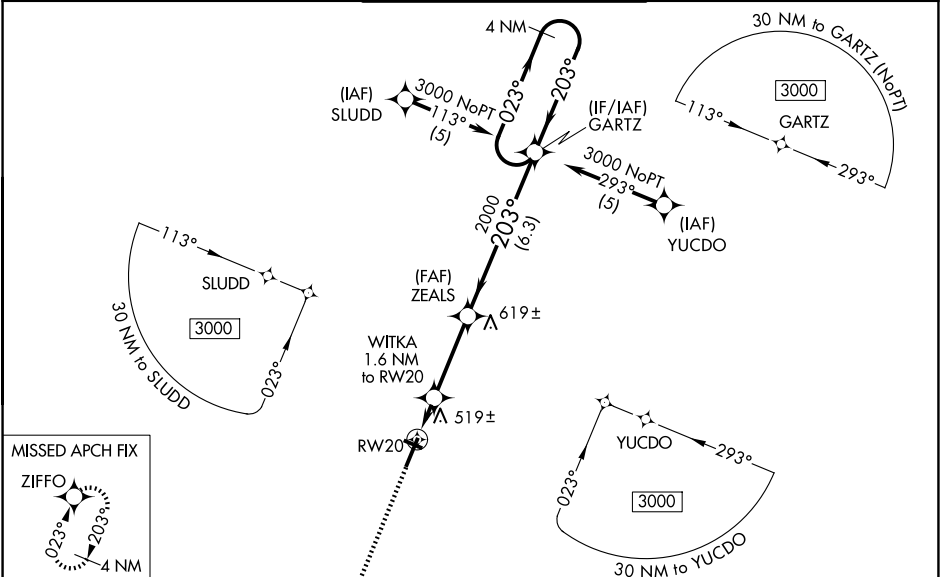

ELEV 433

TDZE 418

203°

TWR

3539 X 100

0.4% Up

6005 X 150

20

29

2

25

HIRL Rwy 2-20

MIRL Rwy 11-29

3000

ZIFFO

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 46).

* LNAV only

WITKA 1.6 NM to RW20

ZEALS

RW20

*960

2000

1.6 NM 3.2 NM 6.3 NM

4 NM Holding Pattern

GARTZ

023°

203°

3000

GP 3.00° TCH 50

CATEGORY				
LPV DA	710-1 292 (300-1)			
LNAV/VNAV DA	818-1½ 400 (400-1½)			
LNAV MDA	780-1 362 (400-1)			780-1¼ 362 (400-1¼)
CIRCLING	900-1 467 (500-1)	920-1 487 (500-1)	960-1½ 527 (600-1½)	1100-2 667 (700-2)