


WAAS CH 93702 W06A	APP CRS 057°	Rwy Ldg TDZE 2351 Apt Elev 2351
--	------------------------	---

RNAV (GPS) RWY 6
GENERAL WM J FOX AIRFIELD (WJT)

▼ When VGSI inop, Straight-in/Circling Rwy 6 procedure NA at night.
▲ DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 45°C (113°F). When local altimeter setting not received, use Palmdale altimeter setting: increase LPV DA to 2661 feet, LNAV/VNAV DA to 2709 feet and all MDAs 60 feet, and increase Circling Cats C/D visibility ¼ SM. Baro-VNAV NA when using Palmdale altimeter setting.

MISSED APPROACH: Climb to 6000 direct SISOY and via 091° track to ETHER and hold.

ATIS 126.3	JOSHUA APP CON 126.1 290.3	FOX TOWER* 118.525 (CTAF) 256.9	GND CON 121.7 256.9	UNICOM 122.95
----------------------	--------------------------------------	---	-------------------------------	-------------------------

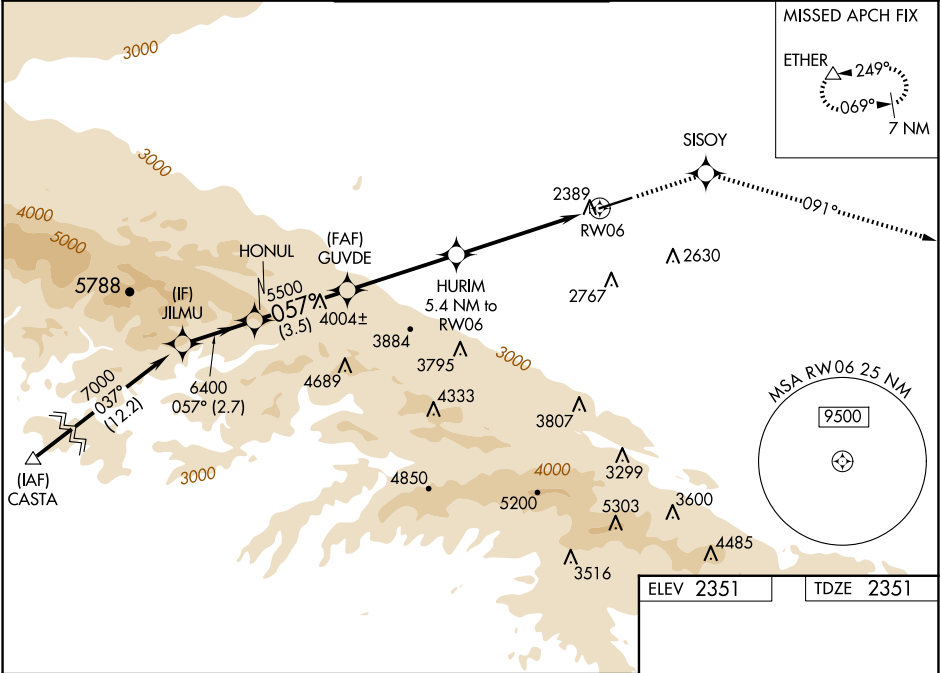

JILMU					HONUL		GUVDE		6000 ↑		SISOY ✦		tr 091°		ETHER △		
7000					057°		6400		5500		*4100		*LNAV only.		RW06		
Procedure Turn NA					GP 3.00° TCH 40		HURIM 5.4 NM to RW06										
2.7 NM					3.5 NM		4.1 NM		5.4 NM								
CATEGORY		A		B		C		D									
LPV DA				2601-1		250 (300-1)											
LNAV/VNAV DA				2649-1		298 (300-1)											
LNAV MDA		2940-1		589 (600-1)		2940-1½ 589 (600-1½)		2940-1¾ 589 (600-1¾)									
CIRCLING		2940-1		589 (600-1)		3120-2¼ 769 (800-2¼)		3120-2½ 769 (800-2½)									

ELEV 2351	TDZE 2351
-----------	-----------

REIL Rwy 6 and 24
MIRL Rwy 6-24

SW-3, 04 SEP 2025 to 02 OCT 2025

SW-3, 04 SEP 2025 to 02 OCT 2025