

WAAS CH 78406 W31A	APP CRS 313°	Rwy Idg 7400 TDZE 1166 Apt Elev 1182
--	------------------------	---

RNAV (GPS) RWY 31

FALLS INTL/EINARSON FLD (INTL)

▼

▲



W

When local altimeter setting not received, use Baudette altimeter setting: increase LPV DA to 1 589 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 1 627 feet and visibility all Cats ½ SM; increase all MDAs 140 feet and visibility LNAV Cat C ¼ SM and Circling Cat C and D ½ SM. For inop MALSR when using Baudette altimeter setting, increase LPV visibility ½ mile all Cats. For inop MALSR, increase LPV visibility ½ mile all Cats, inop table does not apply to LNAV Cat D. VDP NA when using Baudette altimeter setting. Baro-VNAV NA when using Baudette altimeter setting. Circling to Rwy 4-22 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH:
Climb to 3300 direct HODEV and hold.

ASOS 120.0	MINNEAPOLIS CENTER 120.9 377.1	UNICOM 122.8 (CTAF) 0
----------------------	--	---------------------------------

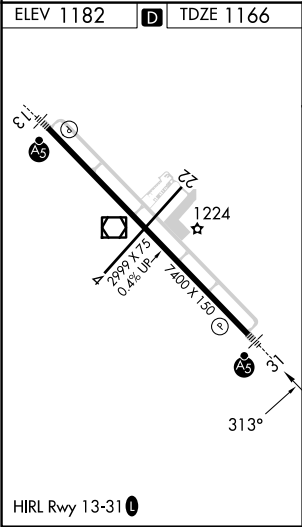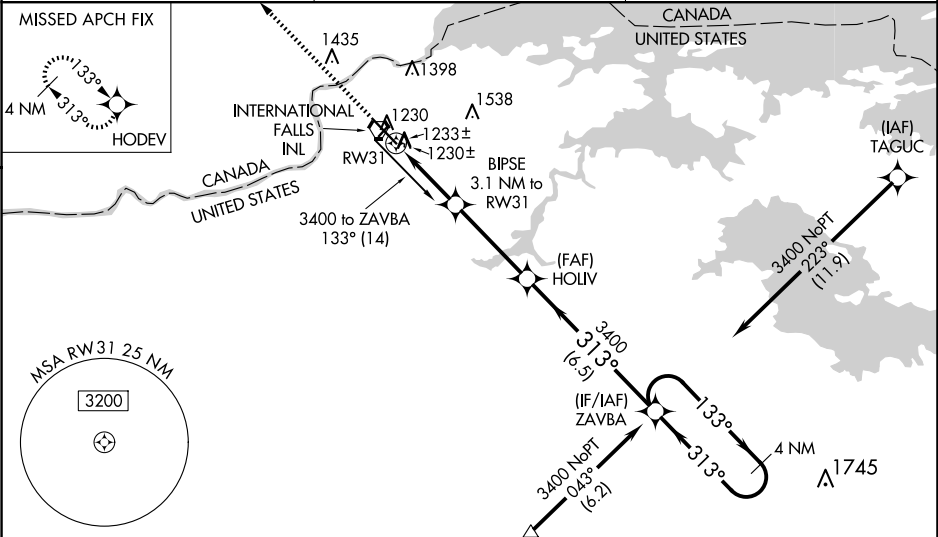

3300	HODEV	BIPSE 3.1 NM to RW31	HOLIV	ZAVBA	4 NM Holding Pattern
*LNAV only.		*0.9 NM to RW31			
		RW31			
		2200*			
		0.9	2.2 NM	3.7 NM	6.5 NM
CATEGORY	A	B	C	D	
LPV DA		1 462-½	296 (300-½)		
LNAV/VNAV DA		1 500-¾	334 (400-¾)		
LNAV MDA		1 500-½	334 (400-½)		1 500-1 334 (400-1)
CIRCLING	1 620-1 438 (500-1)	1 680-1 498 (500-1)	1 900-2 718 (800-2)	1 900-2¼ 718 (800-2¼)	