
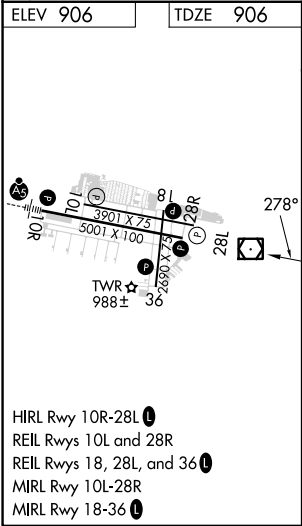


WAAS CH 90218 W28B	APP CRS 278°	Rwy Idg TDZE Apt Elev	5001 906 906
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28L

FLYING CLOUD (F^{CM})

RNP APCH.				MISSED APPROACH: Climb to 2700 direct ZAMUD and hold.	
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Minneapolis- St Paul Intl/Wold-Chamberlain altimeter setting and increase all DA 34 feet and all MDA 40 feet, increase LNAV Cats C and D visibility ⅛ mile. Helicopters visibility reduction below ¾ SM NA. When Circling to Rwy 18, 36 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.					
ATIS 124.9	MINNEAPOLIS APP CON 134.7 284.7	FLYING CLOUD TOWER ★ 119.15 (CTAF) 0	GND CON 121.7	CLNC DEL 121.7 (When twr closed)	UNICOM 122.95

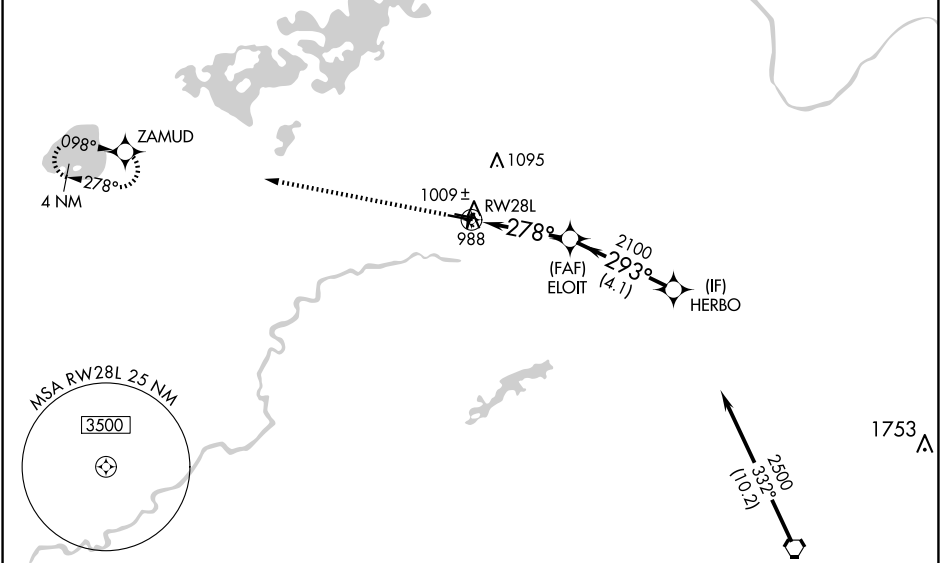

2700

↑

ZAMUD

Procedure NA for arrivals on FGT VORTAC

airway radials 258 CW 011.

(IAF)

FARMINGTON

FGT

VGSI and RNAV glidepath not coincident

(VGSI Angle 3.00/TCH 44).

HERBO

2500

ELOIT

2100

RW28L

278°

293°

2100

GP 3.00°

TCH 55

3.6 NM

4.1 NM

CATEGORY	A	B	C	D
LPV DA	1156-1 250 (300-1)			
LNAV/VNAV DA	1198-1 292 (300-1)			
LNAV MDA	1280-1	374 (400-1)	1280-1½	374 (400-1½)
CIRCLING 1320-1 414 (500-1)	1440-1 534 (600-1)	1440-1½ 534 (600-1½)	1540-2 634 (700-2)	