
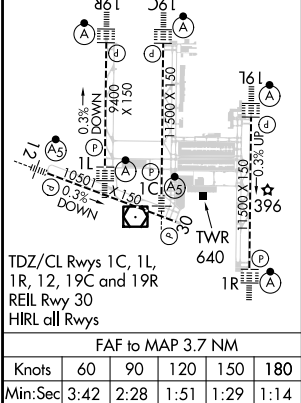


LOC/DME I-HSU 110.75 Chan 44 (Y)	APP CRS 191°	Rwy Idg TDZE Apt Elev	9400 278 312
--	------------------------	-----------------------------	---

ILS or LOC RWY 19R
WASHINGTON DULLES INTL (IAD)

RNP APCH-GPS. From DUBBV.	ALSF-2	MISSED APPROACH: Climb to 800 then climbing right turn to 3000 on heading 280° and AML VOR/DME R-264 to AMOSS INT/AML 20.4 DME and hold.
DME or RADAR required. RADAR required for procedure entry at RUBNZ.		
Simultaneous approach authorized.		

D-ATIS 134.85	POTOMAC APP CON 120.45 306.925 (241°-330°) 128.525 306.925 (091°-240°) 126.1 338.25 (331°-090°)	DULLES TOWER 120.1 317.8 (Rwys 1R/19L) 120.25 348.6 (Rwys 1C/19C) 134.425 348.6 (Rwys 1L/19R and 12/30)	GND CON 121.9 317.8 (EAST) 121.625 348.6 (WEST)
-------------------------	---	---	---

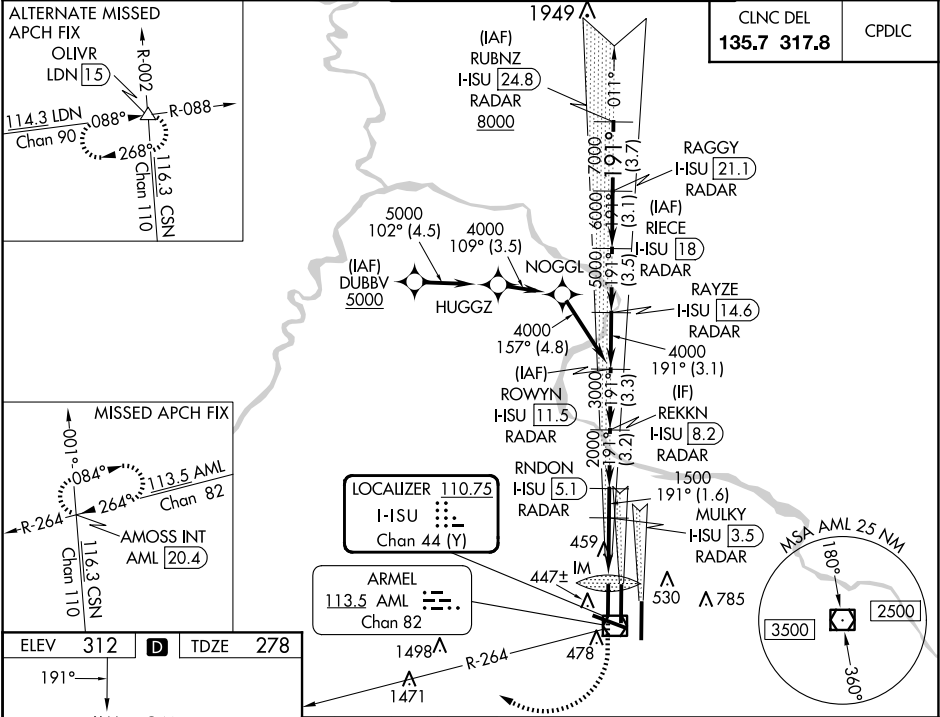

800 3000	AML R-264	AMOSS INT	REKKN I-HSU 8.2 RADAR	RAYZE I-HSU 14.6 RADAR	RAGGY I-HSU 21.1 RADAR	RUBNZ I-HSU 24.8 RADAR
I-HSU DME ANTENNA	MULKY I-HSU 3.5 RADAR	RNDON I-HSU 5.1 RADAR	HSU 11.5 RADAR	RIECE I-HSU 18 RADAR		
I-HSU 0.2	I-HSU 1	1500	2000	3000	4000	5000
1500	2000	3000	4000	5000	6000	7000
GS 3.00° TCH 55						
VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 70).						
0.1	1.1	2.5	1.6	3.2	3.3	3.1
0.1	1.1	2.5	1.6	3.2	3.3	3.1
CATEGORY	A	B	C	D		
S-ILS 19R	478/18 200 (200-½)					
S-LOC 19R	720/24 442 (500-½)		720/45 442 (500-¾)			
CIRCLING	940-1 628 (700-1)		940-1¾ 628 (700-1¾)		1180-2¾ 868 (900-2¾)	