

WAAS	APP CRS	Rwy Ldg	10702
CH 65817	334°	TDZE	17
W33A		Apt Elev	17

RNAV (GPS) RWY 33

CHENNAULT INTL (CWF')

RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using Lake Charles Rgnl altimeter setting.

⚠



For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

ASR

When local altimeter setting not received, use Lake Charles Rgnl altimeter setting and increase LPV DA to 233 feet; increase LNAV/VNAV DA to 510 feet and all visibilities ½ SM. Increase all MDAs 20 feet and LNAV visibility Cat C/D ½ SM.

MISSED APPROACH: Climb to 2000 direct CEVKU and hold.

ATIS	LAKE CHARLES APP CON ★	CHENNAULT TOWER ★	GND CON	UNICOM
120.0	119.8 282.3	124.2 (CTAF) 0 290.4	121.65 275.8	122.95

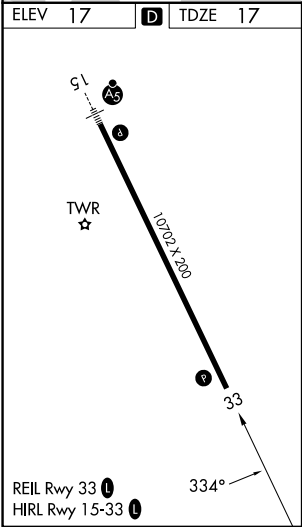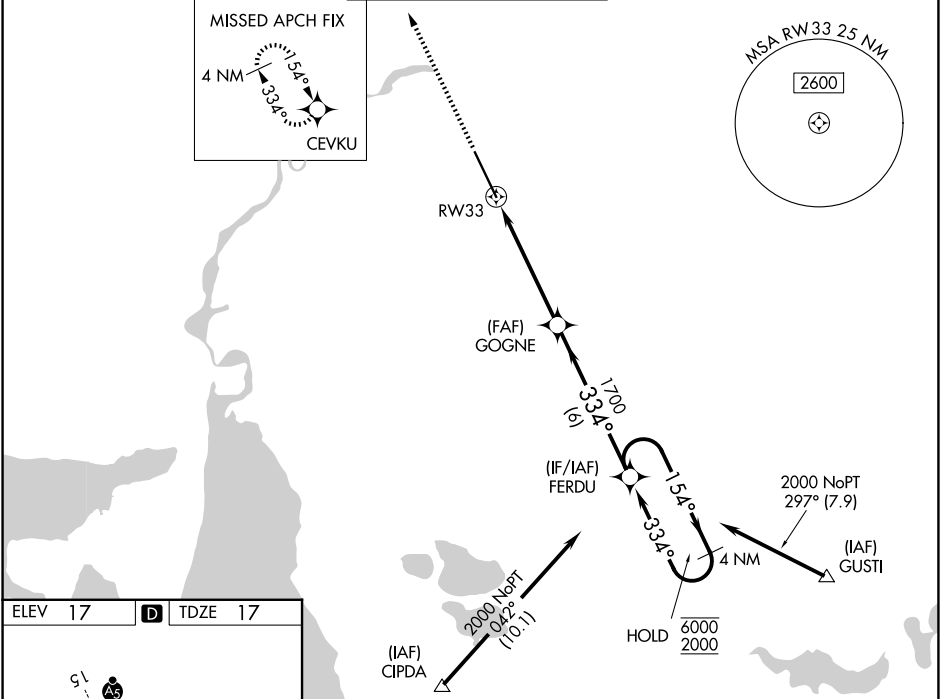

2000

CEVKU

↑

✦

1.6 NM to RW33

1700

1700

1.6

3.5 NM

6 NM

334°

154°

334°

4 NM Holding Pattern

6000

2000

GP 3.00° TCH 53

FERDU

1.6

3.5 NM

6 NM

334°

154°

334°

CATEGORY	A	B	C	D
LPV DA		217-¾	200 (200-¾)	
LNAV/VNAV DA		494-1¾	477 (500-1¾)	
LNAV MDA	580-1	563 (600-1)	580-1½	563 (600-1½)
CIRCLING	640-1	623 (700-1)	640-1¾	740-2¼
			623 (700-1¾)	723 (800-2¼)

SC-4, 04 SEP 2025 to 02 OCT 2025

SC-4, 04 SEP 2025 to 02 OCT 2025