

JACKSON, MISSISSIPPI

AL-5132 (FAA)

25051

WAAS CH 49211 W16B	APP CRS 159°	Rwy Idg 8500 TDZE 320 Apt Elev 346
--	------------------------	---

RNAV (GPS) RWY 16R
JACKSON-MEDGAR WILEY EVERS INTL (JAN)

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Circling
A NA for Cat E southwest of Rwy 16R-34L. When local altimeter setting not received, use Hawkins Fld
ASR altimeter setting and increase all DA 19 feet and all MDA 20 feet, increase LNAV/VNAV all Cats
and LNAV Cat C/D/E visibility $\frac{1}{8}$ SM. Rwy 16R helicopter visibility reduction below $\frac{3}{4}$ SM NA.
VDP and Baro-VNAV NA when using Hawkins Fld altimeter setting.


MISSED APPROACH:
Climb to 3000 direct
FAVIN and hold.

ATIS
121.05


JACKSON APP CON★
123.9 317.7

JACKSON TOWER ★
120.9 (CTAF) **L** 352.0

GND CON
121.7 348.6

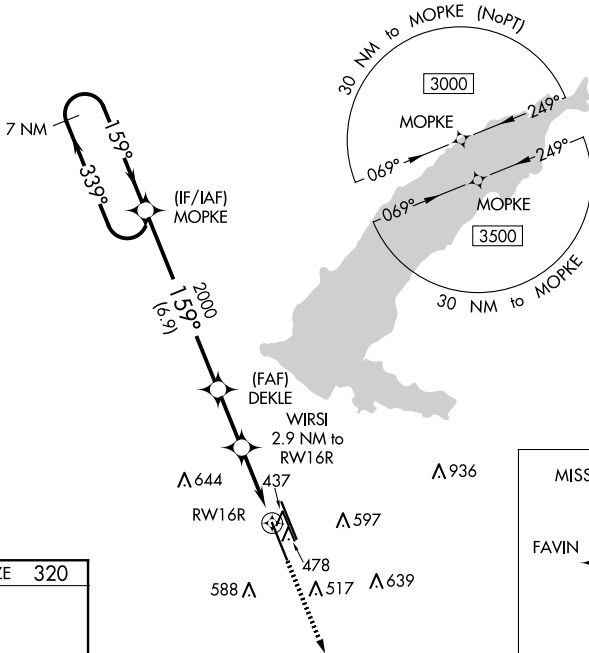UNICOM
122.95

MISSED APCH FIX

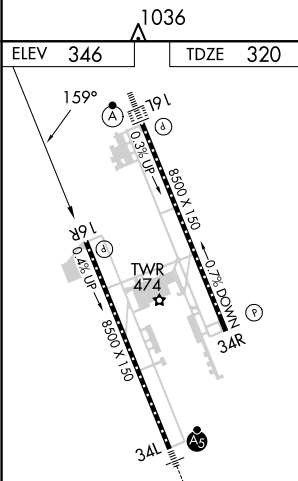

TDZ/CL Rwy 16L and 34L
REIL Rwy 16R and 34R **(L)**
HIRL Rwy 16L-34R and 16R-34L **(L)**

7 NM Holding Pattern MOPKE VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 80). 3000 ← 339° → 159° GP 3.00° TCH 55 2000 *1280 WIRSI 2.9 NM to RW16R *1.1 NM to RW16R RW16R *RNAV only. DEKLE 2000 MOPKE FAVIN 3000 ↑ ✦					
CATEGORY	A	B	C	D	E
LPV DA	621-1		301 (300-1)		
LNAV/ VNAV DA	638-1		318 (300-1)		
LNAB MDA	720-1	400 (400-1)	720-1½ 400 (400-1½)		
C CIRCLING	880-1 534 (600-1)	900-1 554 (600-1)	900-1½ 554 (600-1½)	960-2 614 (700-2)	1040-2½ 694 (700-2½)

JACKSON, MISSISSIPPI
Amdt 2C 22APR21

JACKSON-MEDGAR WILEY EVERS INTL (JAN)
W RNAV (GPS) RWY 16R

32°19'N-90°05'W

SC-4, 04 SEP 2025 to 02 OCT 2025

SC-4, 04 SEP 2025 to 02 OCT 2025