

WAAS
CH **93711**
W36A

APP CRS
002°

Rwy Ldg **6161**
TDZE **1351**
Apt Elev **1365**

RNAV (GPS) RWY 36


BOONE COUNTY (HRO)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Mountain Home altimeter setting. When local altimeter setting not received, use Mountain Home altimeter setting and increase all DA 139 feet and all MDA 140 feet, increase LPV all Cats and LNAV and Circling Cat C and D visibility ¼ mile, increase LNAV/VNAV all Cats visibility ½ mile. For inoperative MALSR when using Mountain Home altimeter setting, increase LPV all Cats visibility to 1¼.

MALSR

MISSED APPROACH: Climb to 3200 direct ADOKE and hold.

ASOS 121.125	MEMPHIS CENTER 126.85 281.55	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

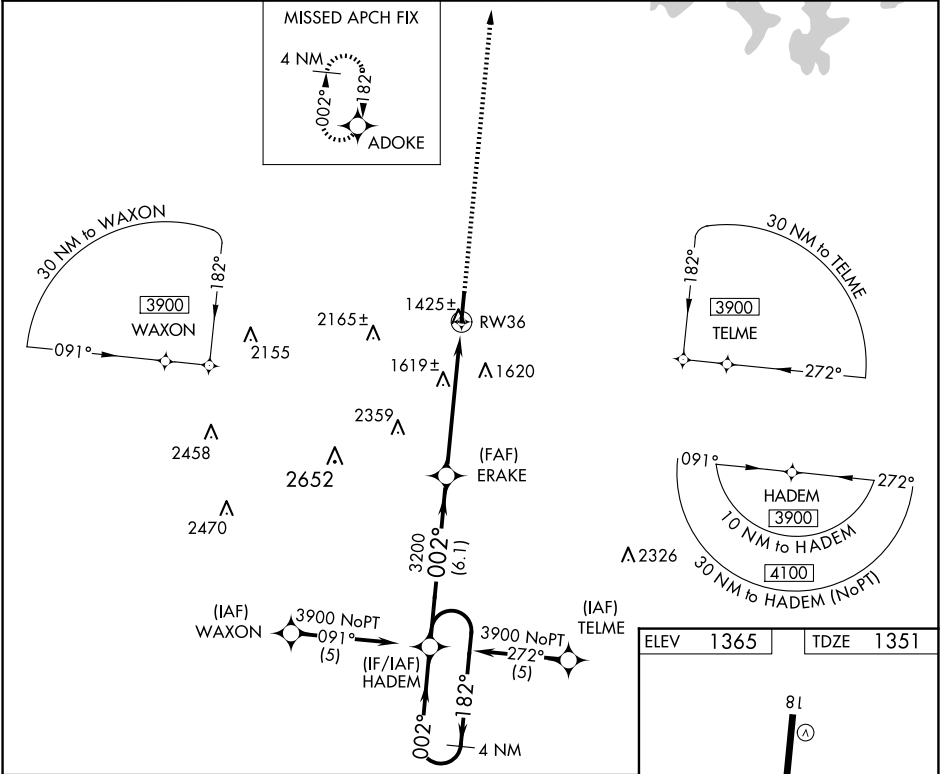

4 NM Holding Pattern		HADEM	ERAKE	3200 ADOKE
3900 ←182°		002° →	002°	*1.5 NM to RW36
GP 3.00° TCH 52		3200		*LNAV only.
		6.1 NM	4.1 NM	1.5 NM
CATEGORY	A	B	C	D
LPV DA	1601-1½ 250 (300-1½)			
LNAV/VNAV DA	1815-1 464 (500-1)			
LNAV MDA	1880-1½ 529 (600-1½)		1880-1 529 (600-1)	1880-1¼ 529 (600-1¼)
CIRCLING	1880-1 515 (600-1)		2340-3 975 (1000-3)	2560-3 1195 (1200-3)