


LOC/DME I-SWO 109.15 Chan 28 (Y)	APP CRS 175°	Rwy Idg TDZE Apt Elev	7401 1000 1000
--	------------------------	-----------------------------	---

ILS or LOC RWY 17
STILLWATER RGNL (SWO)

ADF required. ▼ VDP NA when using Ponca City altimeter setting. When local altimeter setting not received, use Ponca City altimeter setting and increase S-ILS 17 DA to 1280 feet; increase all MDAs 80 feet and S-LOC 17 visibility Cats C/D ½ SM, and increase Circling Cat C visibility ¼ SM and Cat D visibility ½ SM. For inop ALS when using Ponca City altimeter setting, increase S-ILS 17 all Cats visibility to ¾ SM.	MALSR AS	MISSED APPROACH: Climb to 1500 then climbing right turn to 3200 direct GABEH LOM and hold, continue climb-in-hold to 3200.
--	--	---

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	---	-------------------------	-------------------------

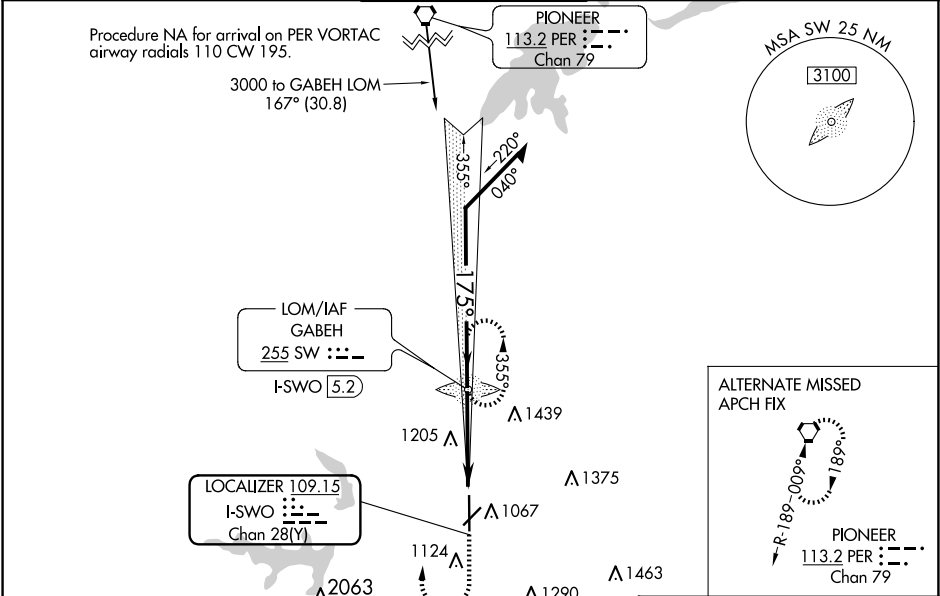

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 50).				1500	3200	SW
Remain within 10 NM						
2600 355° 175° 2300 2260 GS 3.00° TCH 42				I-SWO 2.7 I-SWO 1.4 2.5 NM 1.3		
CATEGORY	A	B	C	D		
S-ILS 17	1200-½		200 (200-½)			
S-LOC 17	1460-½	460 (500-½)	1460-¾	460 (500-¾)		
CIRCLING	1460-1 460 (500-1)	1480-1 480 (500-1)	1540-1½ 540 (600-½)	1740-2¼ 740 (800-2¼)		
				ELEV 1000	TDZE 1000	
				174° AS 7401 X 100 5002 X 75 0.5% UP 0.5% UP 35 TWR 1018		
				REIL Rwy 35	MIRL Rwy 4-22 and 17-35	
				FAF to MAP 3.8 NM		
				Knots	60	90 120 150 180
				Min:Sec	3:48	2:32 1:54 1:31 1:16