
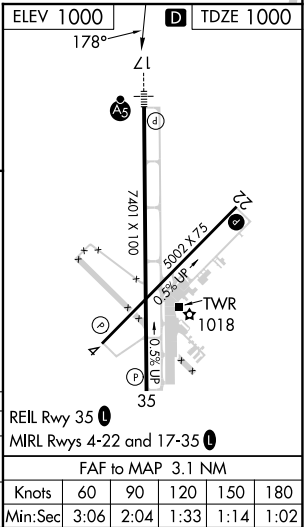
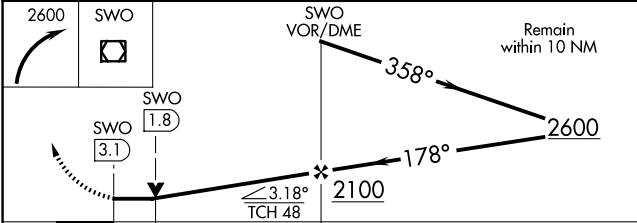


VOR/DME SWO	APP CRS	Rwy Idg	7401
108.4	178°	TDZE	1000
Chan 21		Apt Elev	1000

VOR RWY 17
STILLWATER RGNL (SWO)

⚠ When local altimeter setting not received, use Ponca City Rgnl altimeter setting and increase all MDA 80 feet and Circling Cat D visibility ½ mile. VDP NA with Ponca City altimeter setting. For inop MALSR increase S-17 Cats A/B visibility to 1 mile. Helicopter visibility reduction below ¾ SM NA.	MALSR AS	MISSED APPROACH: Climbing right turn to 2600 direct SWO VOR/DME and hold.
---	------------------------	--

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF) 0	GND CON 121.6	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

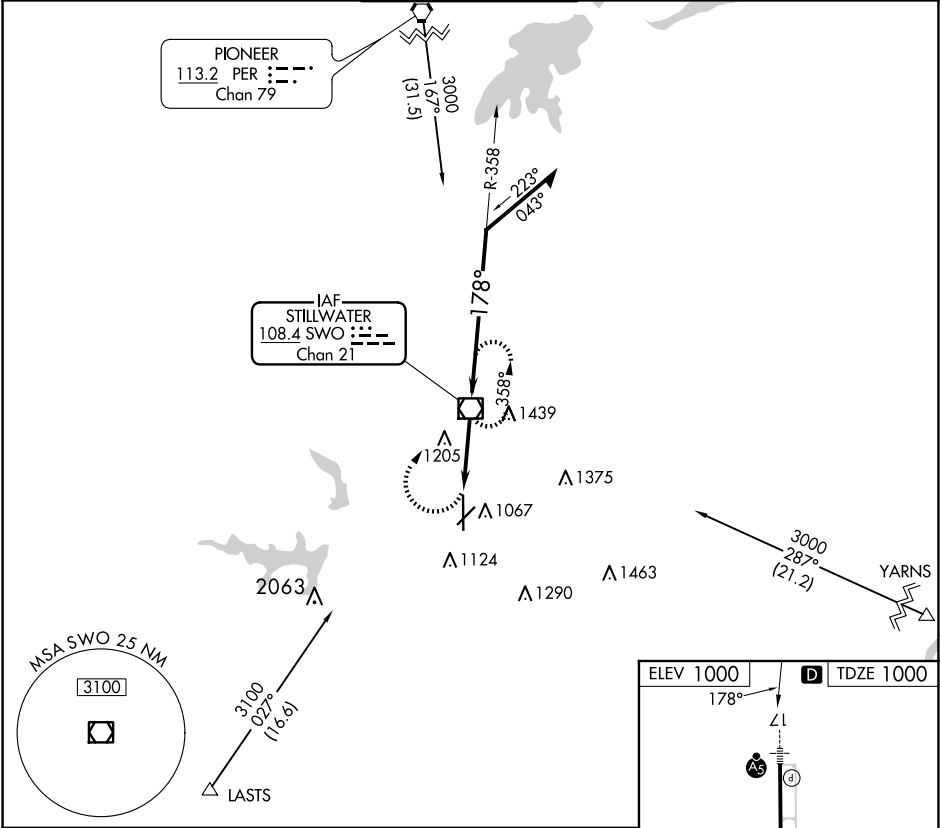

	1.3	1.8 NM				35	
CATEGORY	A		B		C	D	
S-17	1460-¾		460 (500-¾)		1460-1 460 (500-1)		
CIRCLING	1460-1		460 (500-1)		1520-1½ 520 (600-1½)		
					1740-2¼ 740 (800-2¼)		
REIL Rwy 35					MIRL Rwys 4-22 and 17-35		
FAF to MAP					3.1 NM		
Knots					60	90	120 150 180
Min:Sec					3:06	2:04	1:33 1:14 1:02