

APP CRS	Rwy Ldg	3075
047°	TDZE	1352
	Apt Elev	1354

Rwy Ldg	3075
TDZE	1352
Apt Elev	1354

RNAV (GPS) RWY 4
RANGE RGNL (HIB)

RNP APCH - GPS.

T Rwy 4 helicopter visibility reduction below $\frac{3}{4}$ SM NA. VDP NA
A when using Eveleth altimeter setting. When local altimeter setting not
☼ -40°C received, use Eveleth altimeter setting and increase all MDAs 40 feet.


MISSED APPROACH: Climb to 3500 direct SAGOY and hold.

ASOS
126.425

DULUTH APP CON
125.45 233.7

CLNC DEL
127.4

UNICOM
123.0 (CTAF) 

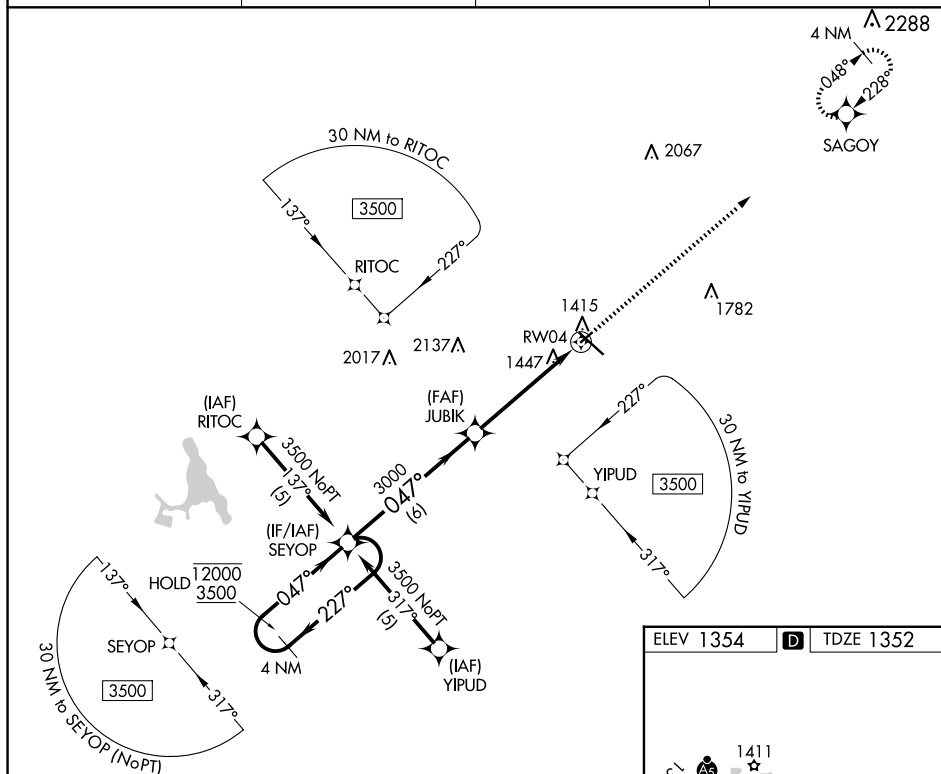

4 NM Holding Pattern

SEYOP

JUBIK

RW04

1.2 NM to RW04

3.03° TCH 45

3000

047°

227°

12000

3500

6 NM

3.8 NM

1.2 NM

CATEGORY	A	B	C	D
LNAV MDA	1780-1	428 (500-1)		NA
CIRCLING	1900-1	546 (600-1)		NA

HIBBING, MINNESOTA

Orig-B 21MAR24

47°23'N-92°50'W

RANGE RGNL (HIB)

RNAV (GPS) RWY 4