

WAAS CH 90419 W24A	APP CRS 245°	Rwy Ldg TDZE Apt Elev	3700 295 302
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 24
WINGS FLD (LOM)

RNP APCH.

T Baro-VNAV NA when using Pottstown altimeter setting. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C
(130°F). When local altimeter setting not received, use Pottstown altimeter
setting and increase all DA 35 feet and all MDA 40 feet. Rwy 24 helicopter
visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH: Climb to 2200
direct PHILA and hold.

AWOS-3 118.925	PHILADELPHIA APP CON 126.85 263.125	CLNC DEL 118.55	UNICOM 123.0 (CTAF) 0
--------------------------	---	---------------------------	---------------------------------

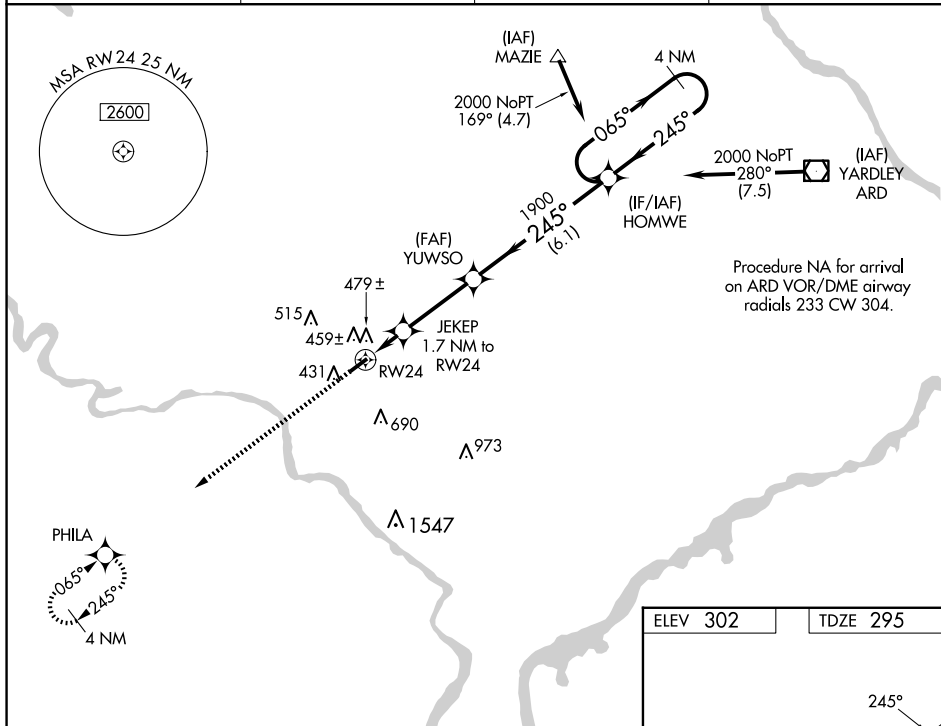

CATEGORY	A	B	C	D
LPV DA	567-1	272 (300-1)		NA
RNAV/VNAV DA	775-1 3/4	480 (500-1 3/4)		NA
RNAV MDA	740-1	445 (500-1)		NA
CIRCLING	780-1	478 (500-1)		NA

