

WAAS CH 82512 W05A	APP CRS 054°	Rwy Idg 6051 TDZE 439 Apt Elev 439
--	------------------------	---



RNAV (GPS) RWY 5
MADISONVILLE RGNL (2I0)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using EVV altimeter setting. Rwy 5 helicopter visibility reduction below ¼ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use EVV altimeter setting and increase LPV DA to 788 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 818 feet and all visibilities ⅝ SM; increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 2600 direct
LOREE and hold.

AWOS-3 126.475	EVANSVILLE APP CON ★ 124.025 290.9	CLNC DEL 120.1	UNICOM 122.7 (CTAF) 0
--------------------------	--	--------------------------	--

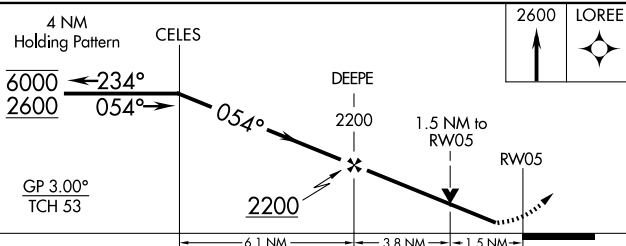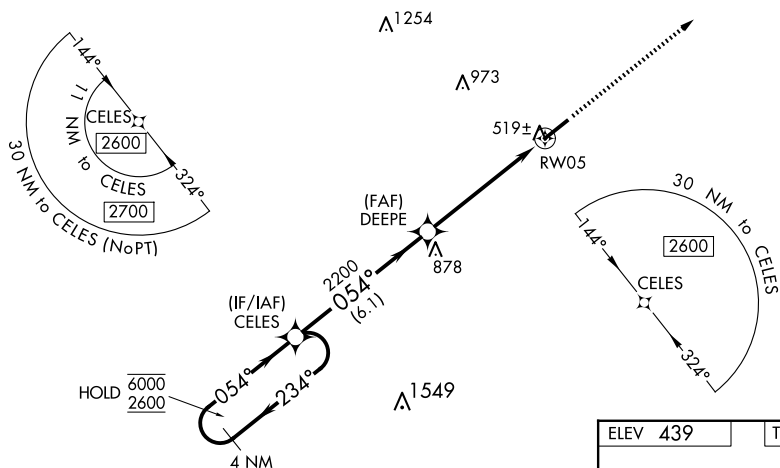

CATEGORY	A	B	C	D
LPV DA		689- ³ / ₄	250 (300- ³ / ₄)	
LNAV/ VNAV DA		719- ⁷ / ₈	280 (300- ⁷ / ₈)	
LNAV MDA	980-1	541 (600-1)	980-1 ⁵ / ₈	541 (600-1 ⁵ / ₈)
 CIRCLING	980-1	541 (600-1)	980-1 ⁵ / ₈ 541 (600-1 ⁵ / ₈)	1340-3 901 (1000-3)

