

WAAS CH 63119 W06A	APP CRS 063°	Rwy Ldg TDZE Apt Elev	5013 394 398
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 6

HARRISBURG-RALEIGH (HSB)

Baro-VNAV NA when using Williamson County Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Marion altimeter setting: increase LPV DA to 744 feet; increase LNAV/VNAV DA to 1020 feet; increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM and Circling visibility Cat C/D ¼ SM. VDP NA with Williamson County Rgnl altimeter setting.

MISSED APPROACH:
Climb to 2000 direct JIVSO and hold.

AWOS-3PT 135.925	KANSAS CITY CENTER 127.475 346.275	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

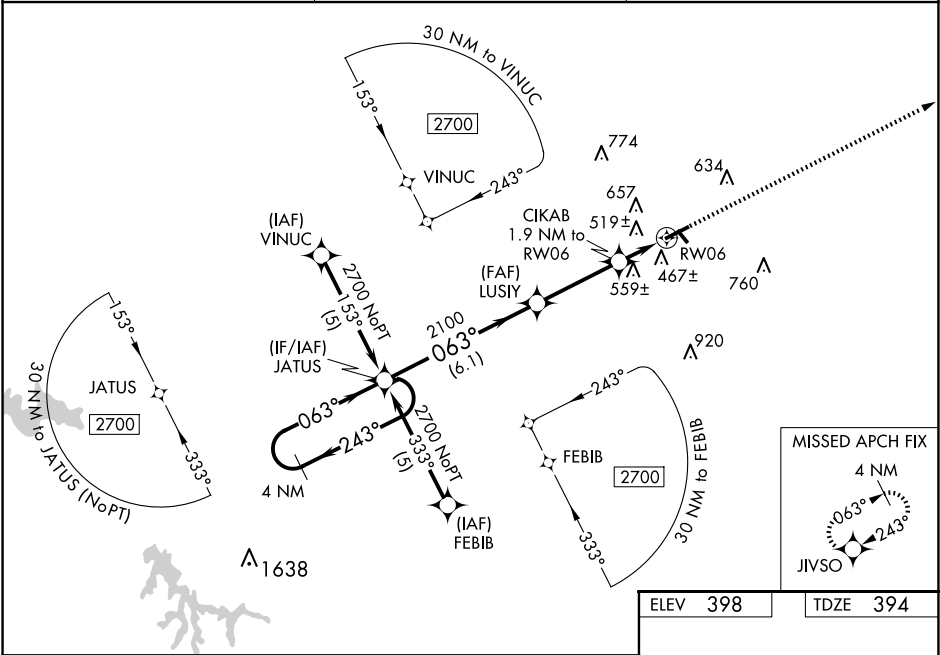

4 NM Holding Pattern		JATUS	LUSIY		CIKAB	2000		JIVSO	
2700		←243°	063°→		2100	1.9 NM to RW06		*LNAV only	
GP 3.00°		063°		2100		*1.3 NM to RW06		RW06	
TCH 35°		6.1 NM		3.3 NM		0.6 NM		1.3 NM	
CATEGORY		A		B		C		D	
LPV DA		682-1		288 (300-1)					
LNAV/VNAV DA		958-2		564 (600-2)					
LNAV MDA		820-1 426 (500-1)		820-1¼ 426 (500-1¼)					
CIRCLING		900-1 502 (600-1)		1020-1 622 (700-1)		1020-1¾ 622 (700-1¾)		1080-2¼ 682 (700-2¼)	

ELEV 398 TDZE 394

REIL Rwy 6 and 24 0
MIRL Rwy 6-24 and 14-32 0