


ILS or LOC RWY 27
ANOKA COUNTY/BLAINE (JANES FLD) (ANE)

⚠ VDP NA when using Crystal altimeter setting. When local altimeter setting not received, use Crystal altimeter setting and increase S-ILS 27 DA to 1131 feet; increase all MDAs 40 feet and S-LOC 27 visibility Cat C/D ¼ SM, and Circling visibility Cat D ¼ SM. For inop ALS when using Crystal altimeter setting, increase S-LOC 27 Cat C/D visibility to 1 ¾ SM.




MISSED
 APCH
 FIX

GOPHER
 GEP : 
 117.3
 Chan 120

← R-264 → 084° 

264° 

GOPHER
117.3 GEP :--:
Chan 120

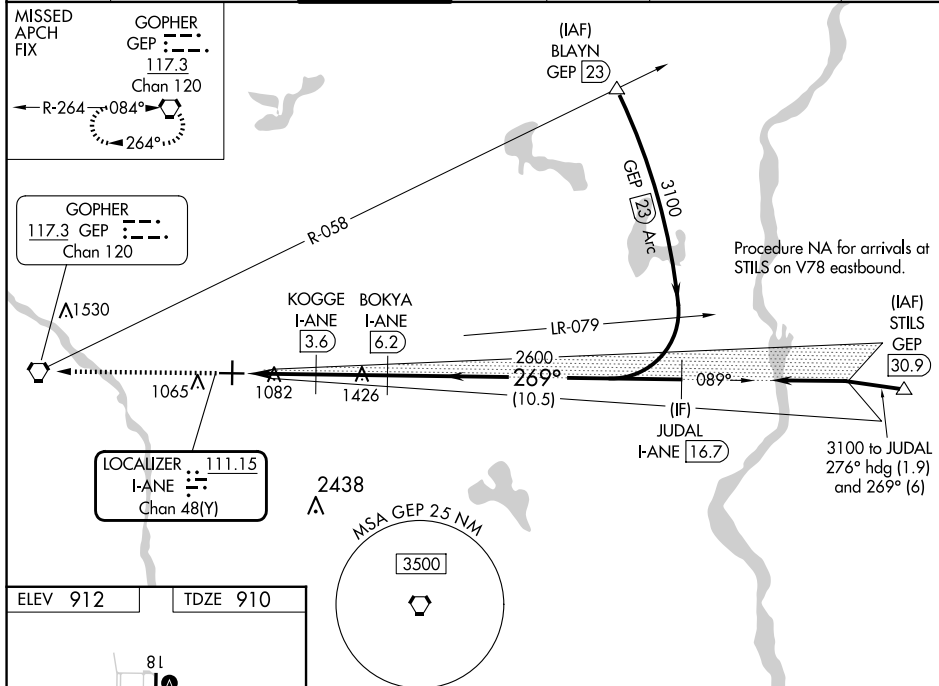


HIRL Rwy 9-27

MRL Rwy 18-36

REIL Rwys 9, 18, and 36

	FAF to MAP 5.2 NM				
Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

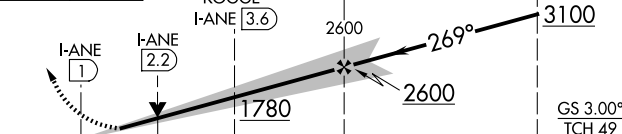2700 ↑	GEP 	Use I-ANE DME when on the localizer course.		JUDAL I-ANE <u>16.7</u>
				
CATEGORY	A	B	C	D
S-ILS 27	1110-½ 200 (200-½)			
S-LOC 27	1340-½ 430 (500-½)		1340-¾ 430 (500-¾)	
C CIRCLING	1400-1 488 (500-1)		1420-1½ 1580-2 508 (600-1½) 668 (700-2)	