

WAAS CH 50212 W27A	APP CRS 270°	Rwy Ldg 6501 TDZE 1230 Apt Elev 1230
--	------------------------	---

RNAV (GPS) RWY 27
GOGEBIC/IRON COUNTY (IWD)


GOGFBIC/IRON COUNTY (IWD)

RNP APCH - GPS.




MISSED APPROACH:
Climb to 3500 direct
GODSE and hold.

AWOS-3PT 125.175	MINNEAPOLIS CENTER 133.55	UNICOM 122.8 (CTAF) 0
----------------------------	-------------------------------------	---------------------------------

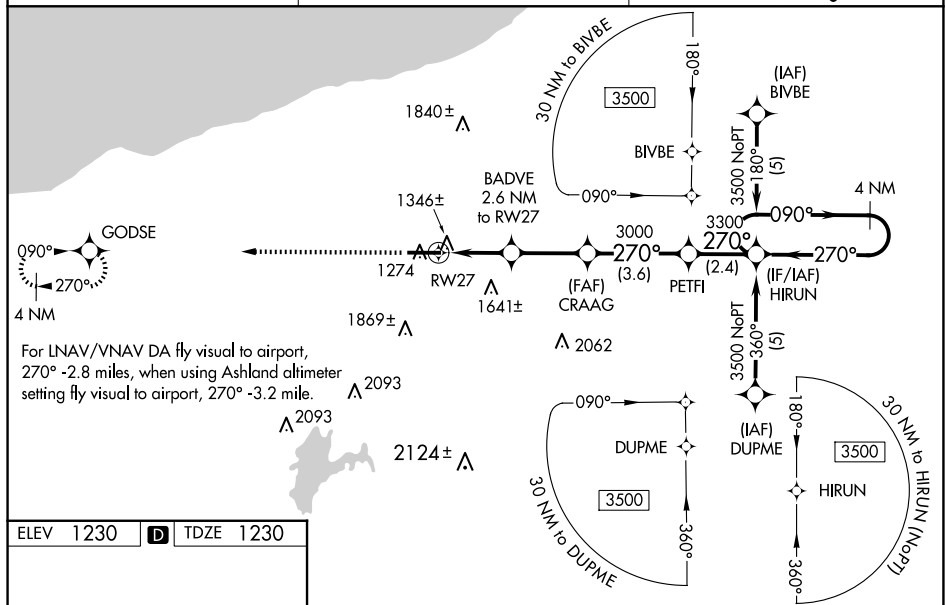

ELEV 1230	D	TDZE 1230
-----------	----------	-----------



3500 ↑	GODSE ✦	* LNAV only		HIRUN		4 NM Holding Pattern
		BADVE 2.6 NM to RW27	CRAAG	PETFI		
		* 1.9 NM to RW27			090° → 3500 ← 270°	GP 3.00° TCH 55
		RW27	2100*	3000	For LNAV/VNAV DA fly visual to airport, 270° -2.8 miles, when using Ashland altimeter setting fly visual to airport, 270° -3.2 mile.	
		1.9	0.7	2.7 NM	3.6 NM	2.4 NM
CATEGORY	A		B		C	D
LPV DA			1430-1		200 (200-1)	
LNAV/ VNAV DA	2166-2	936 (1000-2)	2166-2 ³ / ₄ 936 (1000-2 ³ / ₄)		2166-3 936 (1000-3)	
LNAV MDA	1900-1	670 (700-1)	1900-1 ¹ / ₄ 670 (700-1 ¹ / ₄)		1900-1 ¹ / ₂ 670 (700-1 ¹ / ₂)	
CIRCLING	2100-1 ¹ / ₄	870 (900-1 ¹ / ₄)	2200-3 970 (1000-3)		2220-3 990 (1000-3)	