

WAAS CH 77900 W13A	APP CRS 130°	Rwy Ldg TDZE 1301 Apt Elev 1304
--	------------------------	---

RNAV (GPS) RWY 13

MITCHELL MUNI (MHE)

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA with Huron Rgnl altimeter setting.

⚠

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huron Rgnl altimeter setting and increase all DA 89 feet and all MDA 100 feet. Increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats and LNAV Cats C/D visibility ⅓ mile and Circling Cat C visibility ¼ mile.

MISSED APPROACH: Climb to 3200 direct JUTUB and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

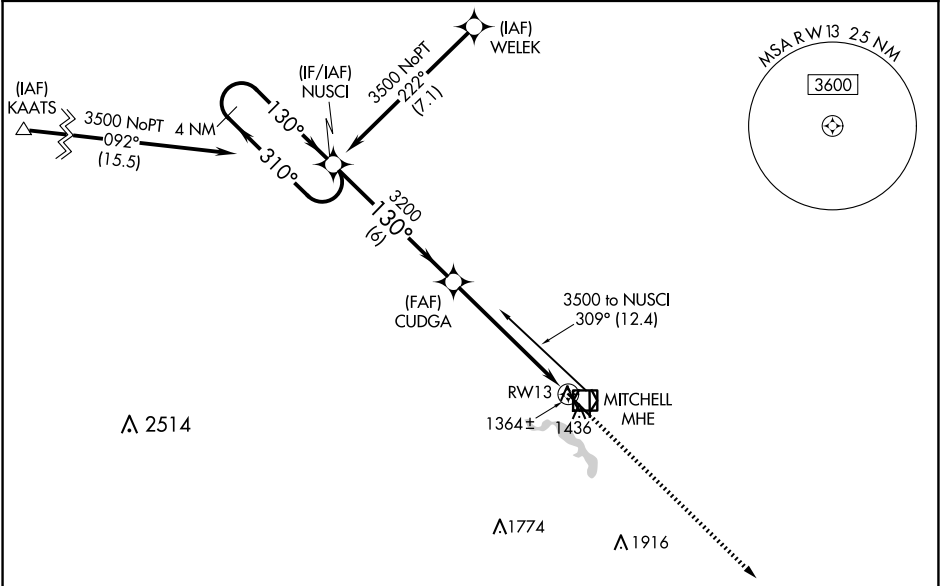

ELEV 1304

TDZE 1301

HIRL Rwy 13-31 0

MIRL Rwy 18-36 0

REIL Rwy 13 and 18 0

4 NM Holding Pattern				NUSCI		CUDGA		3200	JUTUB
3500				310°		130°		3200	
GP 3.00° TCH 46				3200		3200		*0.9 NM to RW13	
				6 NM		4.8 NM		0.9	
CATEGORY		A		B		C		D	
LPV	DA	1575-1		274 (300-1)					
LNAV/ VNAV	DA	1627-1¼		326 (400-1¼)					
LNAV	MDA	1620-1		319 (400-1)					
CIRCLING		1740-1¼	1760-1¼	1820-1½	1860-2				
		436 (500-1¼)	456 (500-1¼)	516 (600-½)	556 (600-2)				

NC-1, 04 SEP 2025 to 02 OCT 2025

NC-1, 04 SEP 2025 to 02 OCT 2025