

WAAS CH 70700 W31A	APP CRS 310°	Rwy Ldg TDZE 1304 Apt Elev 1304
--	------------------------	---

RNAV (GPS) RWY 31


MITCHELL MUNI (MHE)

For uncompensated Baro-VNAV systems, LNAV-VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Huron Rgnl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Huron Rgnl altimeter setting and increase all DA 89 feet and all MDA 100 feet. Increase LPV all Cats visibility 1⁄8 mile. Increase LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cat C visibility 1⁄4 mile. For inop MALSR, increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cats C/D to 1 3⁄8 mile. For inop MALSR when using Huron Rgnl altimeter setting, increase LPV all Cats visibility to 1 1⁄8 mile.

MALSR

MISSED APPROACH:
Climb to 3500 direct NUSCI and hold.

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	--

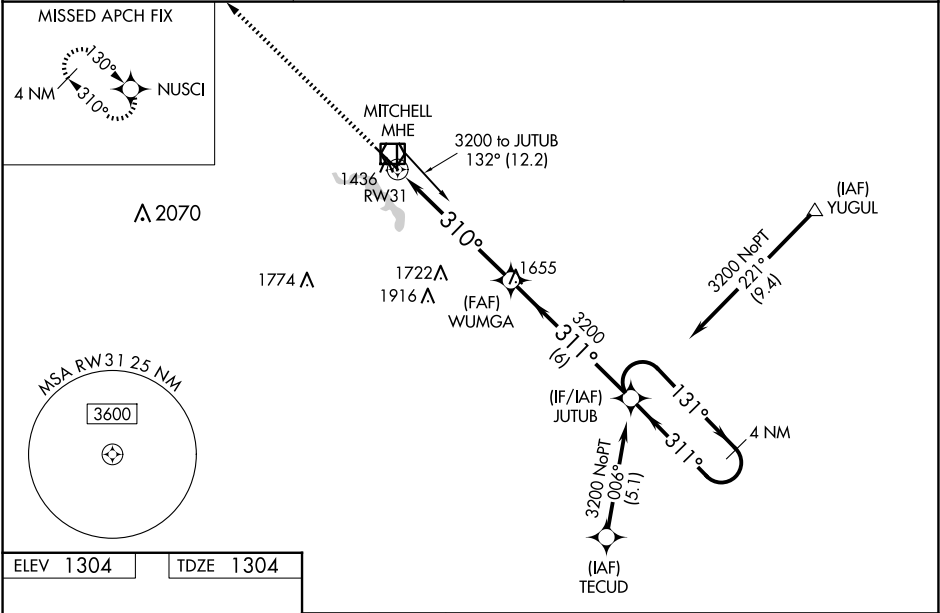

ELEV **1304**

TDZE **1304**

13

8 L

5513 X 100

6701 X 100

36

310°

HIRL Rwy 13-31 **0**

MIRL Rwy 18-36 **0**

REIL Rwy 13 and 18 **0**

3500

NUSCI

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 61).

*LNAV only

1.4 NM to RW31

310°

311°

3200

3200

4.3 NM

6 NM

4 NM Holding Pattern

131°

3200

GP 3.00°

TCH 57

CATEGORY	A	B	C	D
LPV DA	1554-1⁄2 250 (300-1⁄2)			
LNAV/VNAV DA	1625-5⁄8 321 (400-5⁄8)			
LNAV MDA	1800-1⁄2 496 (500-1⁄2)	1800-1 496 (500-1)		
C CIRCLING	1800-1 496 (500-1)	1820-1 1⁄2 516 (600-1 1⁄2)	1860-2 556 (600-2)	