


VOR/DME MHE 114.15 Chan 88 (Y)	APP CRS 117°	Rwy Ldg TDZE Apt Elev	6701 1301 1304
--	------------------------	-----------------------------	---

VOR RWY 13
MITCHELL MUNI (MHE)

▼ VDP NA when using HON altimeter setting. When local altimeter setting not received, use HON altimeter setting and increase all MDAs 100 feet and S-13 visibility Cat C/D ¼ SM and Circling visibility Cat C/D ¼ SM; increase GEBEL fix minimums (DME Required) S-13 visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ¼ SM.	MISSED APPROACH: Climb to 2900 then climbing left turn to 3000 direct MHE VOR/DME and hold.
--	--

ASOS 124.175	MINNEAPOLIS CENTER 126.25 339.8	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

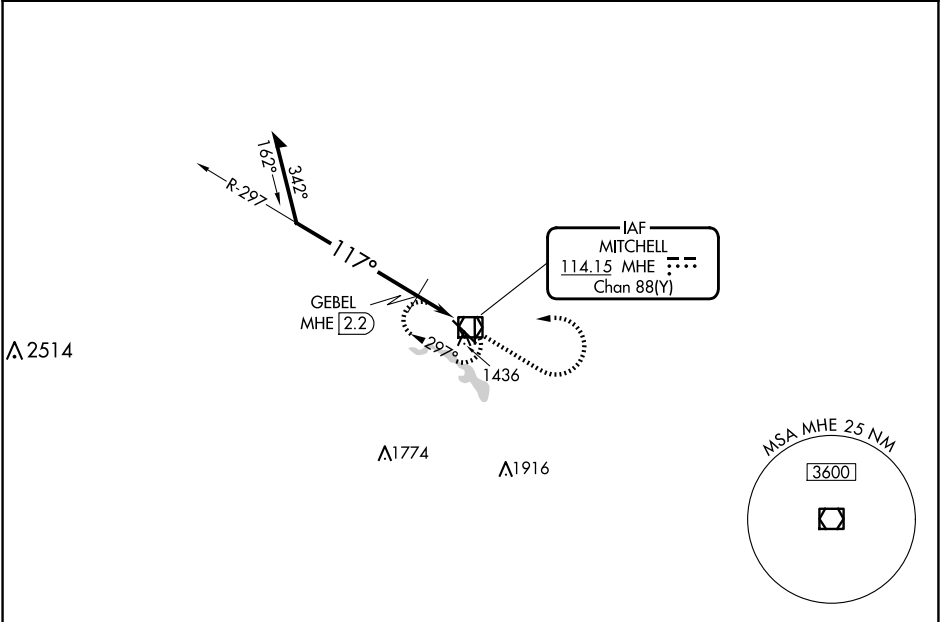

ELEV 1304		TDZE 1301	
Remain within 10 NM		MHE VOR/DME 3000	
2900		2900 3000 MHE	
2900		*1960 when using HON altimeter setting	
2900		MHE	
2900		*1960	
2900		0.5 1.1 NM 0.6	
CATEGORY	A	B	C D
S-13	1860-1	559 (600-1)	1860-1½ 559 (600-1½)
CIRCLING	1860-1	556 (600-1)	1860-1½ 556 (600-1½) 1860-2 556 (600-2)
GEBEL FIX MINIMUMS (DME REQUIRED)			
S-13	1680-1	379 (400-1)	
CIRCLING	1740-1 436 (500-1)	1760-1 456 (500-1)	1820-1½ 516 (600-1½) 1860-2 556 (600-2)
HIRL Rwy 13-31 0		MIRL Rwy 18-36 0	
REIL Rwy 13 and 18 0			