

WAAS CH 69623 W27A	APP CRS 270°	Rwy Ldg TDZE 239 Apt Elev 246
--	------------------------	---

RNAV (GPS) RWY 27

WINDHAM (IJD)


▼

▲

Procedure NA at night. DME/DME RNP-0.3 NA. Rwy 27 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Windsor Locks altimeter setting and increase all MDA 80 feet, increase LP and LNAV Cat B and Circling Cats A/B visibility ¼ SM, increase LP, LNAV and Circling Cat C visibility ½ SM.

MISSED APPROACH:
Climbing left turn to 2600 direct ORW
VOR/DME and hold.

ASOS 133.675	YANKEE APP CON 127.8 269.325	CLNC DEL 128.6	UNICOM 122.975 (CTAF) 1
------------------------	--	--------------------------	--

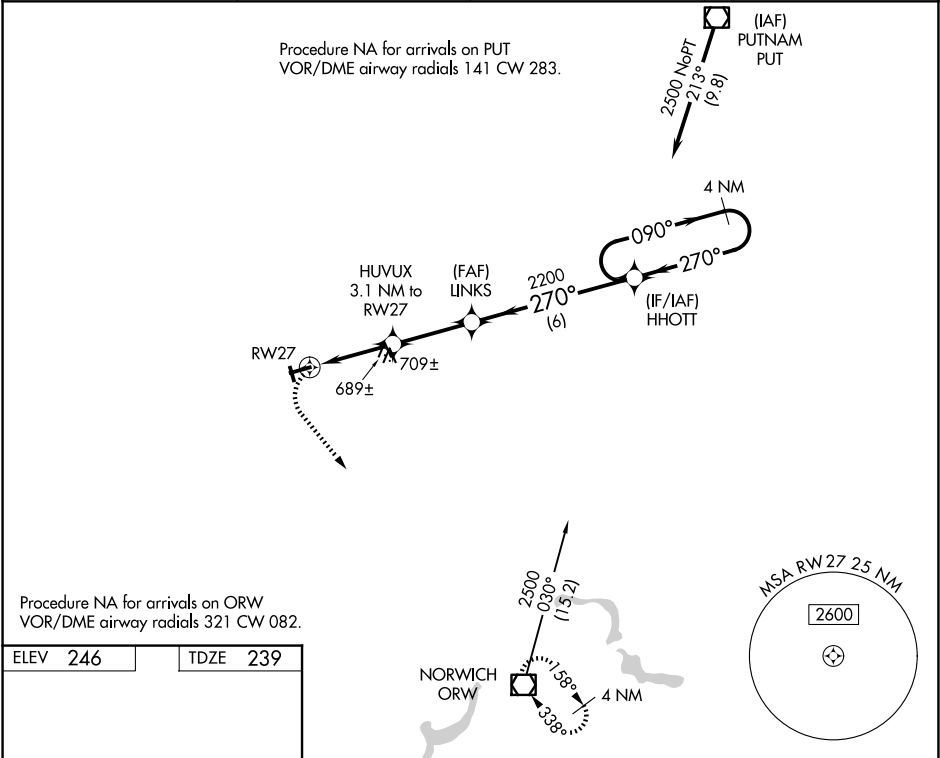

ELEV 246 TDZE 239

81 0 4271 X 100 270° 36 12790 X 75 332

REIL Rwy 27 **1**
MIRL Rwy 9-27 **1**

2600	ORW	Visual Segment - Obstacles.				HHOTT	4 NM Holding Pattern
		HUVUX 3.1 NM to RW27	LINKS	2200	270°	090°	2500
		RW27	1260	3.1 NM	2.9 NM	6 NM	
CATEGORY	A	B	C	D			
LP MDA	940-1	701 (700-1)	940-2	701 (700-2)	NA		
LNAV MDA	960-1	721 (800-1)	960-2	721 (800-2)	NA		
CIRCLING	980-1	734 (800-1)	1120-2½	874 (900-2½)	NA		

NE-1, 04 SEP 2025 to 02 OCT 2025

NE-1, 04 SEP 2025 to 02 OCT 2025