

LOC/DME I-SFZ	APP CRS	Rwy Idg	5000
111.9	047°	TDZE	429
Chan 56		Apt Elev	441

LOC RWY 5

NORTH CENTRAL STATE (SF'Z)

NA


Procedure NA for arrivals on ORW VOR/DME airway radials 057 CW 128.

Circling Rwy 15, 33 NA at night. VDP NA with Providence altimeter setting. When local altimeter setting not received, use Providence altimeter setting and increase all MDA 100 feet; increase S-5 Cat C and Circling Cat C visibility ¼ mile, and ESULE fix minimums S-5 Cat C visibility ¼ mile.

MALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 2500 on ORW VOR/DME R-057 to FOSTY INT/ ORW 23.5 DME and hold.

AWOS-3PT	PROVIDENCE APP CON ★	CINC DEL	UNICOM
120.775	123.675 244.875	124.35	123.075 (CTAF) 0

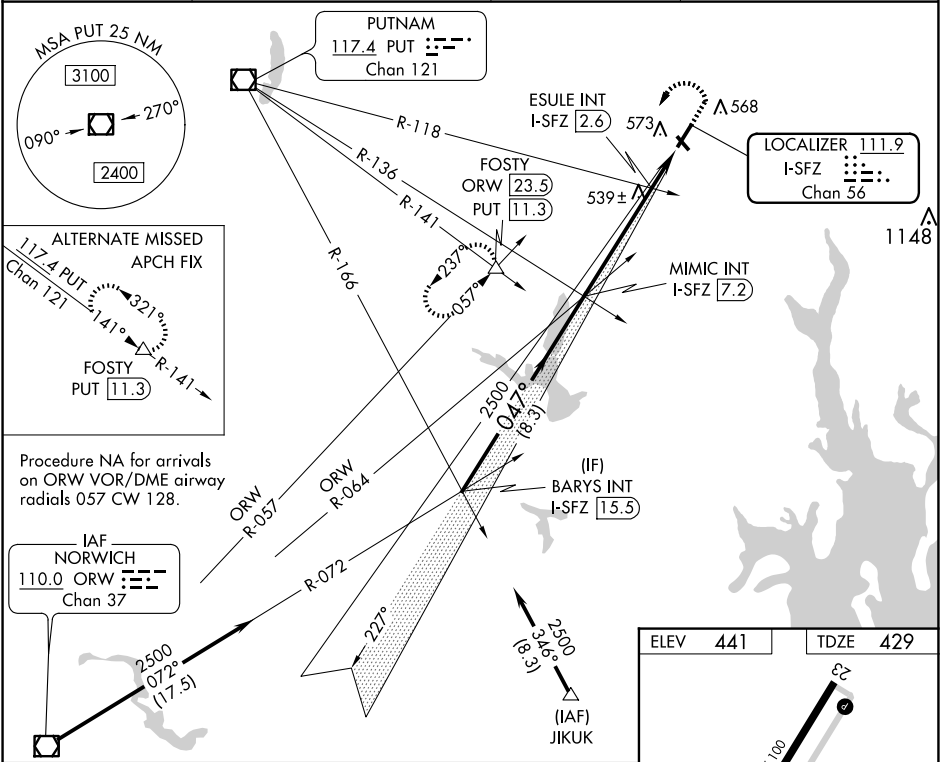

	BARYS INT I-SFZ 15.5	MIMIC INT I-SFZ 7.2	1000 2500	ORW R-057	FOSTY
	2500	2500	3.00° TCH 52	ESULE INT I-SFZ 2.6	I-SFZ 1.9
			*1140 when using Providence altimeter setting.	I-SFZ 0.8	
	8.3 NM	4.6 NM	0.8 NM	1 NM	
CATEGORY	A	B	C	D	
S-5	1040-¾ 611 (600-¾)	1040-1½ 611 (600-1½)	NA		
CIRCLING	1040-1 599 (600-1)	1040-1¾ 599 (600-1¾)	NA		
ESULE FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)					
S-5	800-¾ 371 (400-¾)	800-7⁄8 371 (400-7⁄8)	NA		
CIRCLING	900-1 459 (500-1)	900-1½ 459 (500-1½)	NA		

