


LOC I-MBL	APP CRS	Rwy Idg	5501
108.35	277°	TDZE	621
		Apt Elev	621

ILS or LOC RWY 28

MANISTEE COUNTY/BLACKER (MBL)

ADF required for missed approach. RADAR required for procedure entry. DME or RADAR required.	MALSR	MISSED APPROACH: Climb to 2000 then climbing right turn to 2500 direct JEPOT LOM/MBL 4.8 DME and hold.
Circling Rwy 1, 19 NA at night. For inop ALS, increase FATEV fix minimums S-LOC 28 Cat C and D visibility to 1 SM. DME from MBL DME. DME use requires simultaneous reception of I-MBL and MBL DME.		

AWOS-3PT 118.825	MINNEAPOLIS CENTER 120.85 322.35	UNICOM 122.8 (CTAF) 0
---------------------	-------------------------------------	---------------------------------

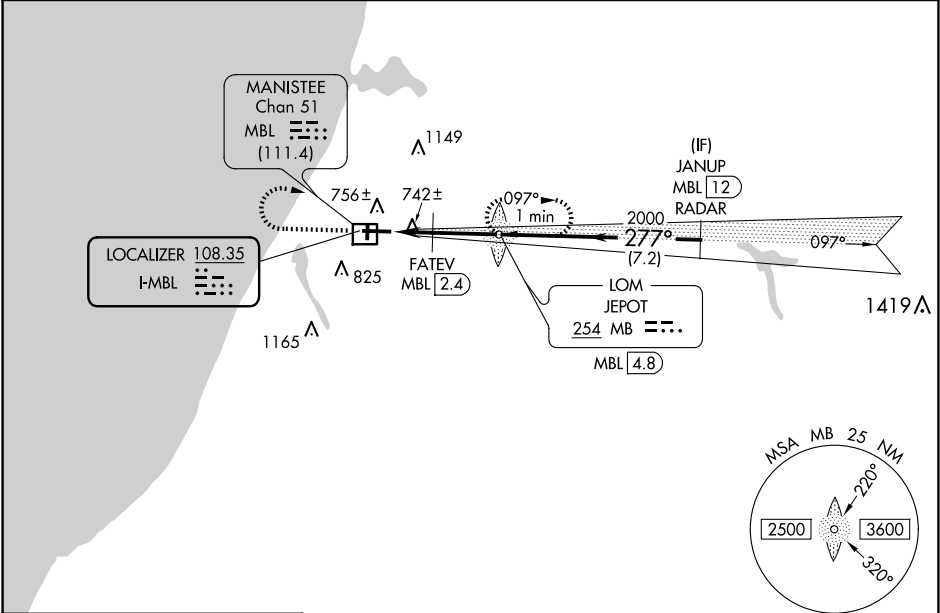

ELEV 621	D	TDZE 621
----------	----------	----------

277°

5501 X 100

2721 X 75

61

10

1

HIRL Rwy 10-28 **0**

MIRL Rwy 1-19 **0**

REIL Rwy 10 **0**

FAF to MAP 3.9 NM				
Knots	60	90	120	150
Min:Sec	3:54	2:36	1:57	1:34

2000	2500	MB LOM	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 45).		JANUP MBL 12 RADAR
			MB LOM JEPOT MBL 4.8		
		FATEV MBL 2.4			
		MBL 1.9			
		MBL 0.9			
			1921	277°	2800
			1160		GS 3.00° TCH 50
	1 NM	0.5 NM	2.4 NM	7.2 NM	
CATEGORY	A		B	C	D
S-ILS 28	821-1/2 200 (200-1/2)				
S-LOC 28	1160-1/2	539 (600-1/2)	1160-1	539 (600-1)	
C CIRCLING	1160-1 539 (600-1)	1220-1 599 (600-1)	1400-2 1/4 779 (800-2 1/4)	1520-3 899 (900-3)	
FATEV FIX MINIMUMS					
S-LOC 28	1000-1/2	379 (400-1/2)	1000-5/8	379 (400-5/8)	
C CIRCLING	1160-1 539 (600-1)	1220-1 599 (600-1)	1400-2 1/4 779 (800-2 1/4)	1520-3 899 (900-3)	

EC-1, 04 SEP 2025 to 02 OCT 2025

EC-1, 04 SEP 2025 to 02 OCT 2025