

WAAS CH 42532 W28A	APP CRS 278°	Rwy Idg 5501 TDZE 621 Apt Elev 621
--	------------------------	---

RNAV (GPS) RWY 28

MANISTEE COUNTY/BLACKER (MBL)

RNP APCH - GPS.

A Circling to Rwy 1, 19 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

MALSR




MISSED APPROACH:
Climb to 2500 direct
GOSDE and hold.

AWOS-3PT
118.825


MINNEAPOLIS CENTER
120.85 322.35

UNICOM
122.8 (CTAF) 

MISSED APCH FIX
GOSDE

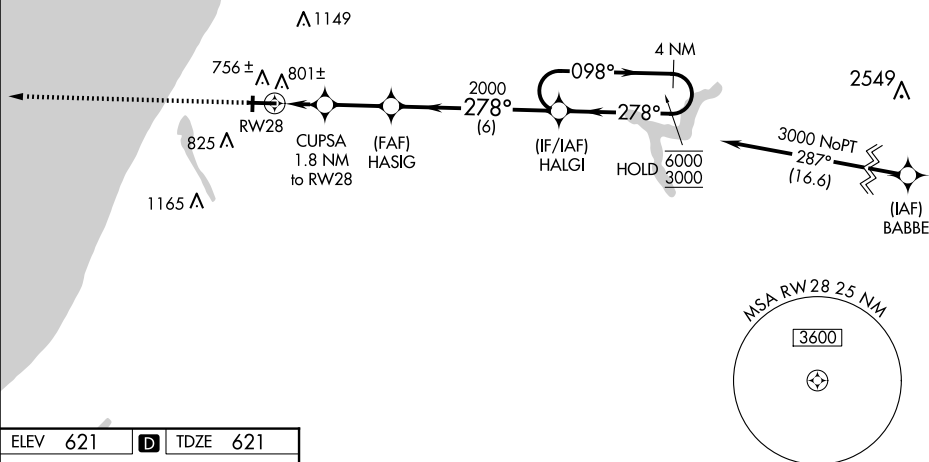


ELEV 621	D	TDZE 621
----------	----------	----------



2500	GOSDE
	

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 45).

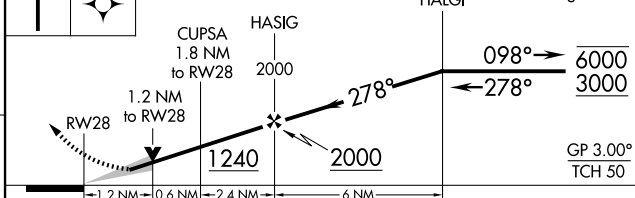4 NM
Holding Pattern

CATEGORY		A		B		C		D	
LPV	DA			821- $\frac{1}{2}$		200 (200- $\frac{1}{2}$)			
LNAV/ VNAV	DA			984- $\frac{5}{8}$		363 (400- $\frac{5}{8}$)			
LNAV	MDA	1060- $\frac{1}{2}$		439 (500- $\frac{1}{2}$)		1060- $\frac{3}{4}$		439 (500- $\frac{3}{4}$)	
CIRCLING		1160-1 539 (600-1)		1220-1 599 (600-1)		1400-2 $\frac{1}{4}$ 779 (800-2 $\frac{1}{4}$)		1500-2 $\frac{3}{4}$ 879 (900-2 $\frac{3}{4}$)	

HIRL Rwy 10-28 **L**
MIRL Rwy 1-19 **L**
REIL Rwy 10 **L**