

WAAS	APP CRS	Rwy Ldg	6500
CH 50107	274°	TDZE	778
W27A		Apt Elev	778

RNAV (GPS) RWY 27

ELKHART MUNI (EKM)

RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using SBN altimeter setting. Circling NA to Rwy's 8 and 26.


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 27 helicopter visibility reduction below RVR 4000 NA. Circling Rwy 36 NA at night. When local altimeter setting not received, use SBN altimeter setting: increase LPV DA to 1105 feet; increase LNAV/VNAV DA to 1255 feet and all visibilities to RVR 5000; increase all MDA 40 feet and LNAV visibility Cat C/D to RVR 5500 and Circling Cat D visibility ½ SM. For inop ALS, increase LPV all Cats visibility to RVR 4500, LNAV Cat A/B visibility RVR 5500 and Cat C/D to 1½ SM. For inop ALS when using SBN altimeter setting, increase LNAV/VNAV all Cats visibility to 1½ SM and LNAV Cat A/B to RVR 5500.

MALS R

MISSED APPROACH:
Climb to 1500 then climbing right turn to 4000 to JJANN and hold.

AWOS-3	SOUTH BEND APP CON ★	ELKHART TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
124.475	118.55 257.8	119.5 (CTAF) 0	121.8	121.8	119.7 (When twr closed)	122.95

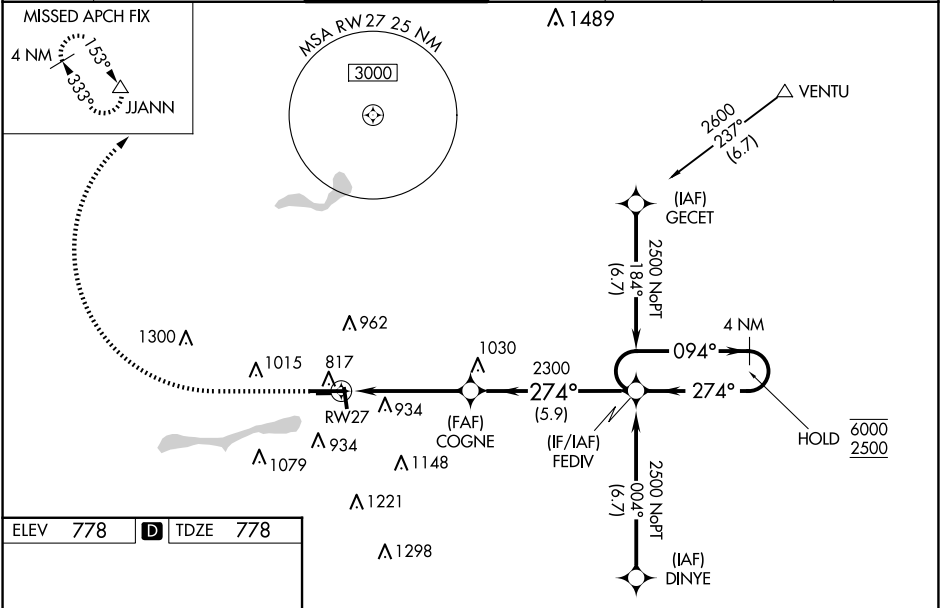

ELEV 778	D	TDZE 778
----------	---	----------

