


TOP ALTITUDE:  
ASSIGNED AT ATC

RNAV-1 DME/DME/IRU or GPS.  
RADAR required.

TAKEOFF MINIMUMS:  
Rwy 10: Standard.  
Rwy 28: Standard with minimum climb  
of 476' per NM to 1500.

DETROIT DEP CON  
132.35 284.0  
AWOS-3  
119.475  
CTAF  
123.05

NOTE: Turbojet departures at/above 10000,  
maintain 280K until advised by ATC.

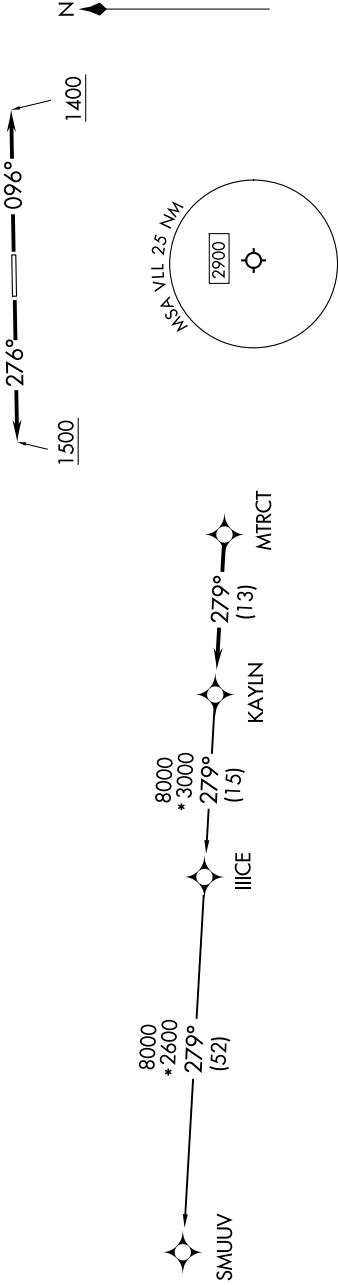

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 10: Climb on heading 096° to 1400 then as assigned by ATC, thence....  
TAKEOFF RUNWAY 28: Climb on heading 276° to 1500 then as assigned by ATC, thence....

....for RADAR vectors to MTRCT, then on track 279° to KAYLN, then on (transition). Maintain ATC assigned altitude, expect  
filed altitude 10 minutes after departure.

SMUUV TRANSITION (KAYLN3.SMUUV):