


LOC I-VKE	APP CRS	Rwy Ldg	6400
108.7	311°	TDZE	1450
		Apt Elev	1469

ILS or LOC RWY 31


DEVILS LAKE RGNL (DVL)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 3400 direct KRAMR and hold.
DME or RADAR required.		
NA VDP NA when using Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase S-ILS 31 DA to 1711 feet; increase all MDAs 80 feet and S-LOC 31 visibility Cat C/D ½ SM, and Circling visibility Cat C/D ¼ SM. DME from DVL DME. DME use requires simultaneous reception of I-VKE and DVL DME. For inop ALS when using Cando altimeter setting, increase S-ILS 31 all Cats visibility to ¾ SM. For inop ALS, increase S-LOC 31 Cat C/D visibility to 1 ¾ SM.		

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
125.875	124.2 270.3	122.8 (CTAF)

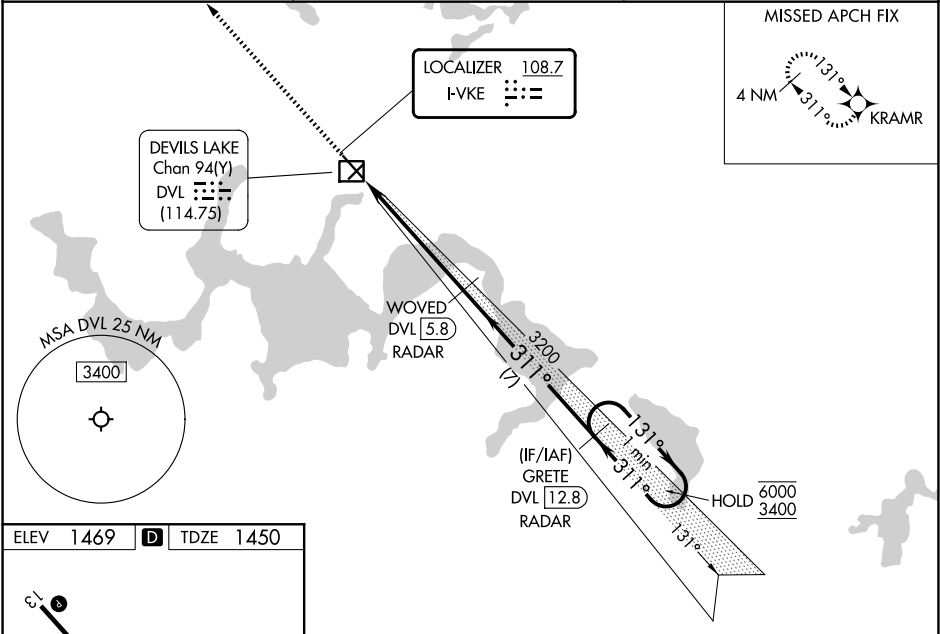

ELEV 1469		TDZE 1450
-----------	--	-----------

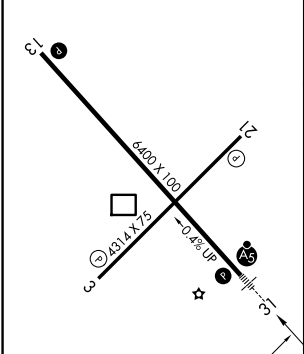

HIRL Rwy 13-31				
REIL Rwy 3, 13 and 21				
MRL Rwy 3-21				
FAF to MAP 5.4 NM				
Knots	60	90	120	150
Min:Sec	5:24	3:36	2:42	2:10
				1:48
CATEGORY	A	B	C	D
S-ILS 31	1650-½		200 (200-½)	
S-LOC 31	1920-½ 470 (500-½)		1920-1 470 (500-1)	
CIRCLING	2000-1 531 (600-1)		2240-2¼ 771 (800-2¼)	
			2240-2½ 771 (800-2½)	