

WAAS CH 78417 W21A	APP CRS 218°	Rwy Ldg TDZE 1449 Apt Elev 1470
--	------------------------	---

RNAV (GPS) RWY 21


DEVILS LAKE RGNL (DVL)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Cando altimeter setting. VDP NA with Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase all DA 63 feet, and all MDA 80 feet, increase LNAV and Circling Cats C and D visibility ¼ mile.

MISSED APPROACH: Climb to 3400 direct ZIKID and hold.

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

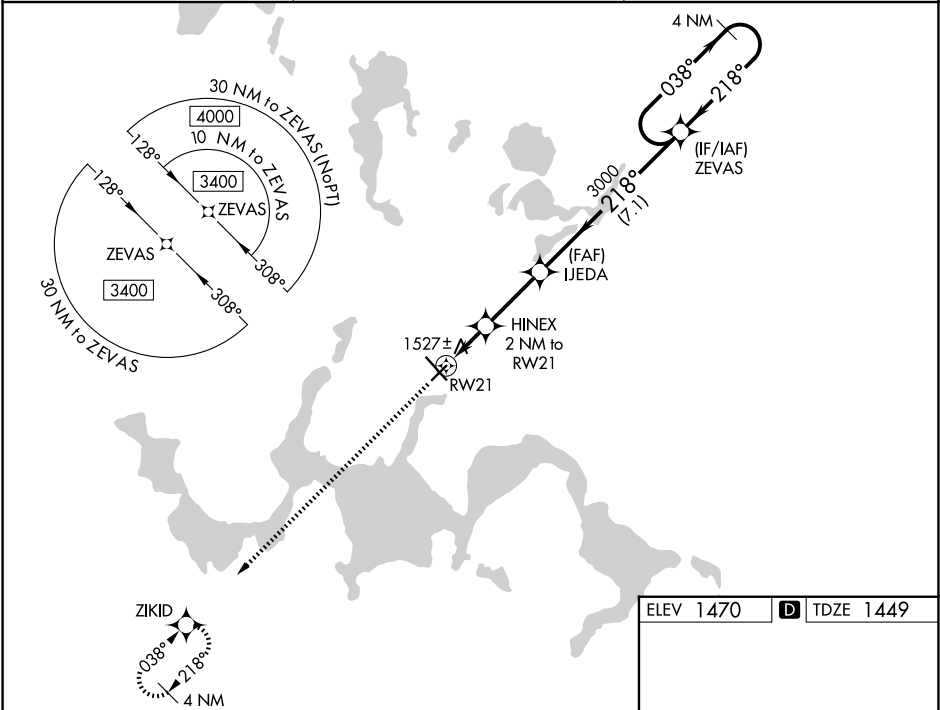

3400	ZIKID	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).				ZEVAS	4 NM Holding Pattern
*LNAV only.		HINEX 2 NM to RWY 21	IJEDA	3000	218°	038° → 3400	
		*1.1 NM to RWY 21				← 218°	
		RWY 21		2120*		3000	GP 3.00° TCH 50
		1.1	0.9	2.7 NM	7.1 NM		
CATEGORY	A	B	C	D			
LPV DA		1699-1	250 (300-1)				
LNAV/VNAV DA		1699-1	250 (300-1)				
LNAV MDA		1800-1	351 (400-1)				
CIRCLING	2000-1	530 (600-1)	2240-2¼ 770 (800-2¼)	2240-2½ 770 (800-2½)			

