

WAAS
CH **72717**
W01A

APP CRS
014°

Rwy Ldg
TDZE **956**
Apt Elev **956**

5701

RNAV (GPS) RWY 1

AMES MUNI (AMW)

RNP APCH.

▼

✳️

-26°C


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). For inop MALSR, increase LNAV Cats A, B visibility to 1 mile.

MALSR

AS

MISSED APPROACH: Climb to 3000 direct FULLE and hold.

ASOS 132.025	DES MOINES APP CON 123.9 307.15	CLNC DEL 126.0	UNICOM 122.7 [CTAF] 0
------------------------	---	--------------------------	--

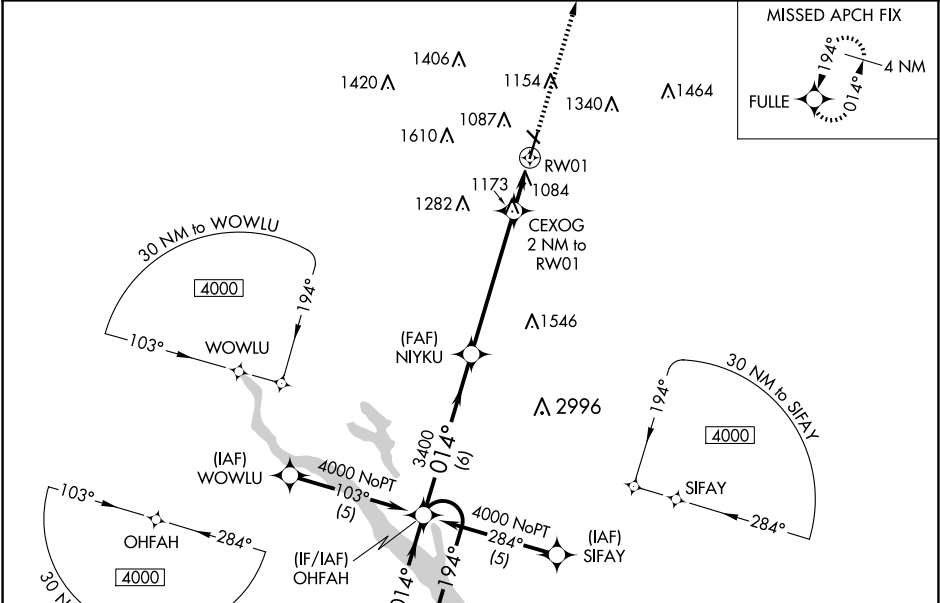

ELEV 956

TDZE 956

3000

FULLE

*LNAV only.

4 NM Holding Pattern

OHFAH

NIYKU

CEXOG 2 NM to RW01

*1.4 NM to RW01

RW01

GP 3.00°

TCH 50

6 NM

5.4 NM

0.6

1.4 NM

CATEGORY	A	B	C	D
LPV DA	1261-3/4	305 (400-3/4)		NA
LNAV/VNAV DA	1364-1	408 (500-1)		NA
LNAV MDA	1440-3/4	484 (500-3/4)		NA
CIRCLING	1440-1 484 (500-1)	1460-1 504 (600-1)	1640-2 684 (700-2)	NA

3491 X 75

61

31

5701 X 100

975

956

014°

HIRL Rwy 1-19 **0**

MIRL Rwy 13-31 **0**