

LOC I-CPS 109.1	APP CRS 302°	Rwy Ldg 7002
		TDZE 411
		Apt Elev 413

ILS or LOC RWY 30L


ST LOUIS DOWNTOWN (CPS)

⚠ When local altimeter setting not received, use St Louis Lambert Intl altimeter setting: increase DA to 674 feet, increase all MDAs 80 feet and visibility S-LOC 30L Cats C/D and Circling Cat C ¼ SM. For inop ALS when using St Louis Lambert Intl altimeter setting, increase S-ILS 30L visibility ¼ SM. Circling Rwy 5 NA at night.


MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 2200 on heading 080° and on I-CPS SE course (122°) to EBOPE INT and hold.

ATIS 121.45	ST LOUIS APP CON 123.7 371.875	DOWNTOWN TOWER ★ 119.925 (CTAF) 0 379.3	GND CON 121.8	CLNC DEL 118.275	CLNC DEL 121.8 (When twr closed)	UNICOM 122.95
-----------------------	--	---	-------------------------	----------------------------	---	-------------------------

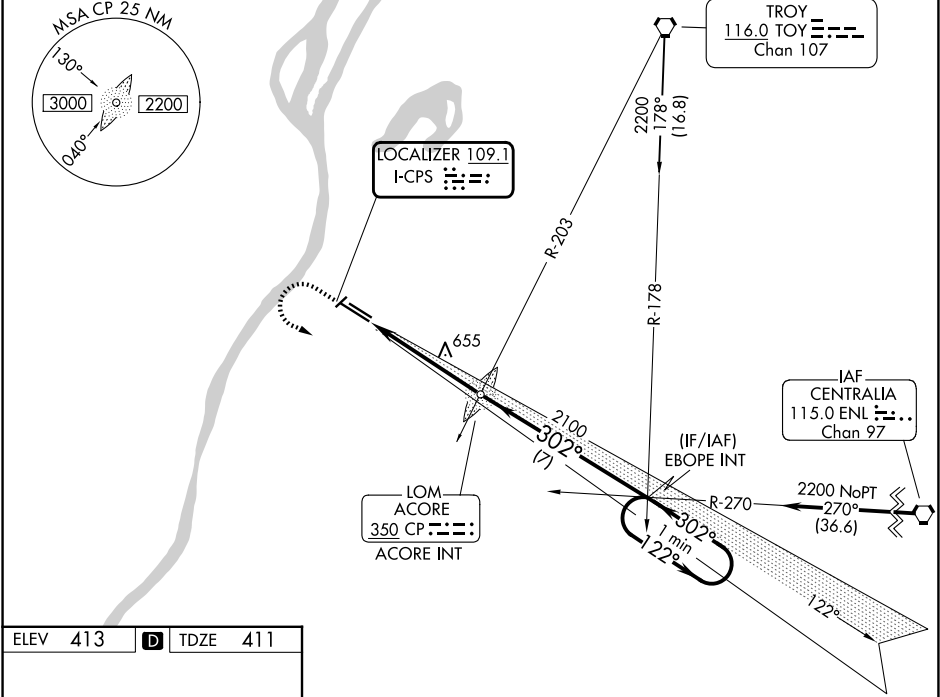

ELEV 413	D	TDZE 411
-----------------	----------	-----------------

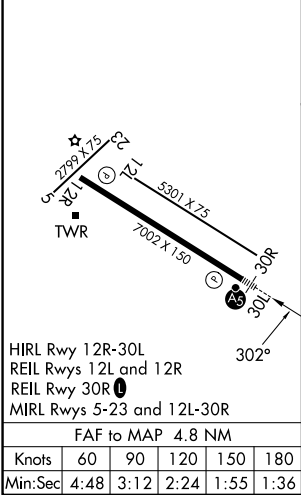

	1400	2200	I-CPS SE crs (122°)	EBOPE INT	ACORE LOM/INT	EBOPE INT	One Minute Holding Pattern
	hdg 080°				2012		
					302°	122°	2200
					2100		GS 3.00° TCH 55
					4.8 NM	7 NM	
CATEGORY	A	B	C	D			
S-ILS 30L		611-½	200 (200-½)				
S-LOC 30L	960-½	549 (600-½)	960-1⅛ 549 (600-1⅛)	960-1¼ 549 (600-1¼)			
CIRCLING	940-1 527 (600-1)	1120-1 707 (800-1)	1240-2½ 827 (900-½)	1380-3 967 (1000-3)			

EC-3, 04 SEP 2025 to 02 OCT 2025

EC-3, 04 SEP 2025 to 02 OCT 2025