

APP CRS	Rwy Idg	4700
095°	TDZE	740
	Apt Elev	747

RNAV (GPS) RWY 9
DOWAGIAC MUNI (C91)


▼

▲ NA

DME/DME RNP-0.3 NA. Procedure NA at night.
Visibility reduction by helicopters NA. Obtain local altimeter setting on CTAF, when not received, use Elkhart altimeter setting and increase all MDA 60 feet; increase LNAV Cat C and Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climb to 2700 direct YEGTU and hold.

SOUTH BEND APP CON ★ 118.55 257.8	UNICOM 122.8 (CTAF) 0
--------------------------------------	--------------------------

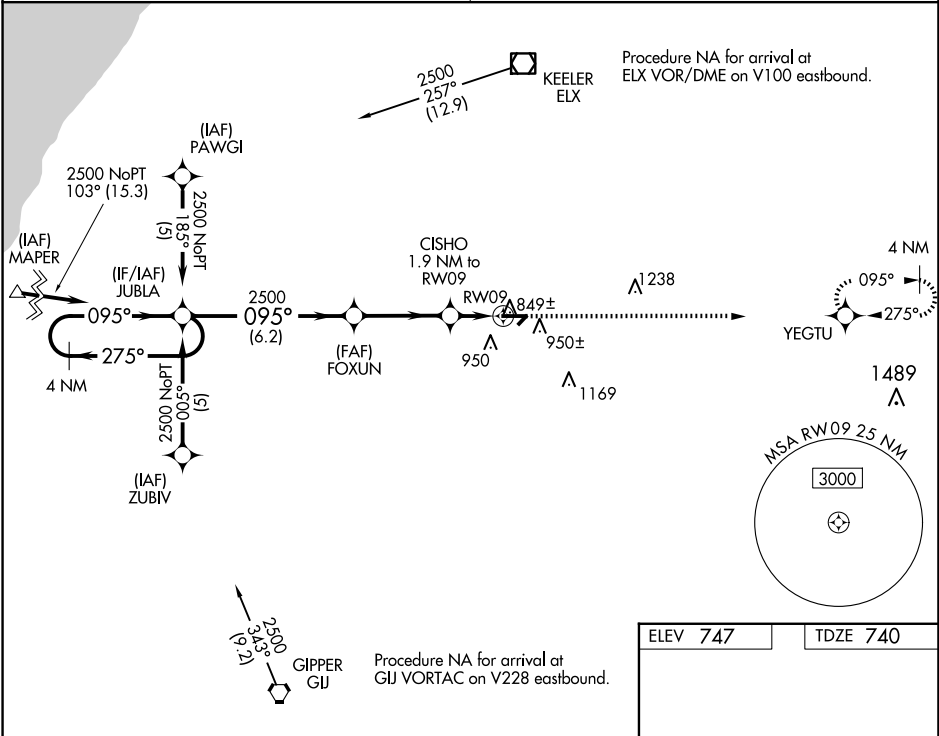

ELEV 747	TDZE 740
----------	----------

4 NM Holding Pattern

2700

YEGTU

JUBLA

FOXUN

CISHO 1.9 NM to RW09

RW09

2500

2500

1380

275°

095°

095°

3.04°

TCH 35

6.2 NM

3.5 NM

1.9

CATEGORY	A	B	C	D
LNAV MDA	1100-1 360 (400-1)			1100-1¼ 360 (400-1¼)
CIRCLING	1320-1 573 (600-1)		1480-2 733 (800-2)	1480-2¼ 733 (800-2¼)

4700 X 100

095°

276 X 100

27

REIL Rwy 9 and 27 0
MIRL Rwy 9-27 0

EC-1, 04 SEP 2025 to 02 OCT 2025

EC-1, 04 SEP 2025 to 02 OCT 2025