

WAAS
CH **78035**
W16B

APP CRS
161°

Rwy Ldg
TDZE **186**
Apt Elev **192**

RNAV (GPS) RWY 16R

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

RNP APCH - GPS.


▼

Rwy 16R helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:

Climb to 700 then climbing right turn to 3000 direct CSN VORTAC and hold.

ATIS 125.175	POTOMAC APP CON 128.525 306.925	MANASSAS TOWER ★ 133.1 (CTAF) 0 360.75	GND CON 121.8	CLNC DEL 120.2
------------------------	---	--	-------------------------	--------------------------

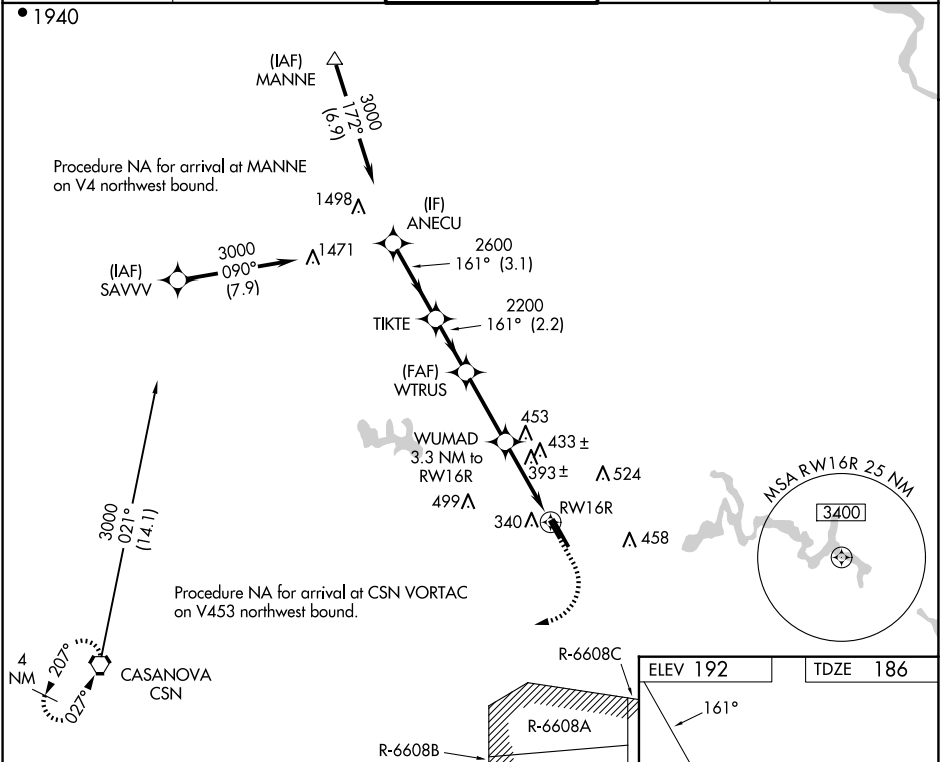

ANECU		TIKTE		WTRUS		WUMAD		CSN	
3000		2600		2200		1280		700	
GP 3.00°		TCH 53							
← 3.1 NM		← 2.2 NM		← 2.9 NM		← 2 NM		← 1.3 NM	
CATEGORY	A	B		C		D			
LPV DA	494-7⁄8		308 (400-7⁄8)						
LNAV/VNAV DA	675-1 3⁄8		489 (500-1 3⁄8)						
LNAV MDA	660-1	474 (500-1)		660-1 3⁄8	474 (500-1 3⁄8)				
CIRCLING	720-1 528 (600-1)	740-1 548 (600-1)		840-1 3⁄4 648 (700-1 3⁄4)	880-2 1⁄4 688 (700-2 1⁄4)				

HIRL Rwy 16L-34R

MIRL Rwy 16R-34L

REIL Rws 16R and 34L