

WAAS CH 70425 W02A	APP CRS 016°	Rwy Idg 5500 TDZE 666 Apt Elev 666
--	------------------------	---

RNAV (GPS) RWY 2


ROCK HILL/YORK COUNTY/BRYANT FLD (UZA)

⚠ Baro-VNAV and VDP NA when using Charlotte/Douglas Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Charlotte/Douglas Intl altimeter setting and increase all DA 45 feet and all MDA 60 feet. Increase LNAV/VNAV all Cats visibility $\frac{1}{8}$ mile and LNAV Cat C/D visibility $\frac{1}{4}$ mile.

MALSR
A5

MISSED APPROACH:
Climb to 1600 then
climbing left turn to 3000
direct CONEL and hold.

ASOS 120.775	CHARLOTTE APP CON 120.05 307.8	GCO 121.725	UNICOM 123.05 (CTAF) 
------------------------	--	-----------------------	--

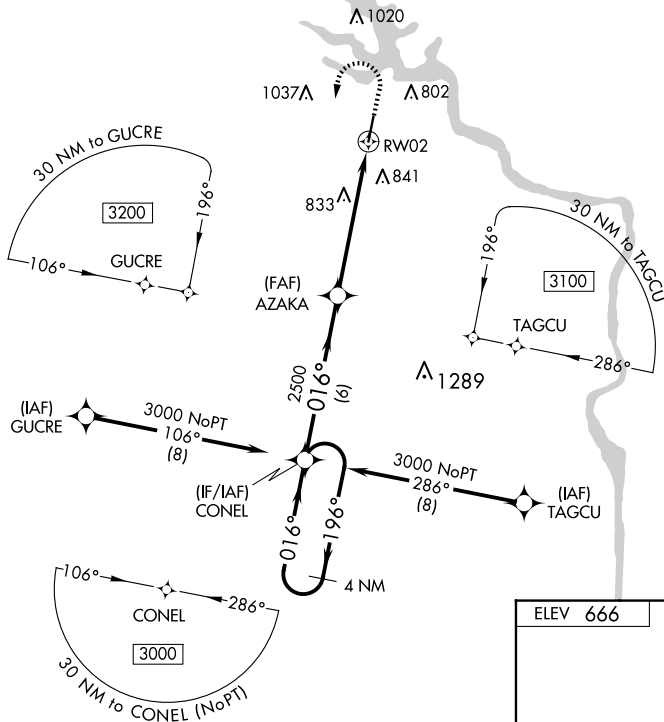

CATEGORY	A	B	C	D
LPV DA		866-1/2	200 (200-1/2)	
LNAV/VNAV DA		1022-3/4	356 (400-3/4)	
LNAV MDA	1100-1/2	434 (500-1/2)	1100-3/4	434 (500-3/4)
C CIRCLING	1140-1 474 (500-1)	1160-1 494 (500-1)	1340-2 674 (700-2)	1340-2 1/4 674 (700-2 1/4)

