


LOC/DME I-BFT	APP CRS	Rwy Idg	24R	24L
109.75	245°	TDZE	6003	5197
Chan 34 (Y)		Apt Elev	583	584
			584	584

ILS or LOC RWY 24R

BURKE LAKEFRONT (BKL)

DME required. RADAR required for procedure entry.	MALSF	MISSED APPROACH: Climb to 1120 then climbing right turn heading 350° and DJB VOR/DME R-056 to cross LLROY/DJB 25.5 DME at or below 2000 then climb to 3000 on DJB VOR/DME R-056 northeast course to NEVTE/DJB 31.1 DME and hold.
▼ Circling Rwy 6R NA at night. Rwy 24R helicopter visibility reduction below ¾ SM NA. Circling NA southeast of Rwy 6R-24L. S-ILS minimums NA when control tower closed. ⚠		

ATIS	CLEVELAND APP CON	LAKEFRONT TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
125.25	125.35 346.325	124.3 (CTAF) 0 339.8	121.9 339.8	339.8	121.9 (when twr closed)	122.95 0

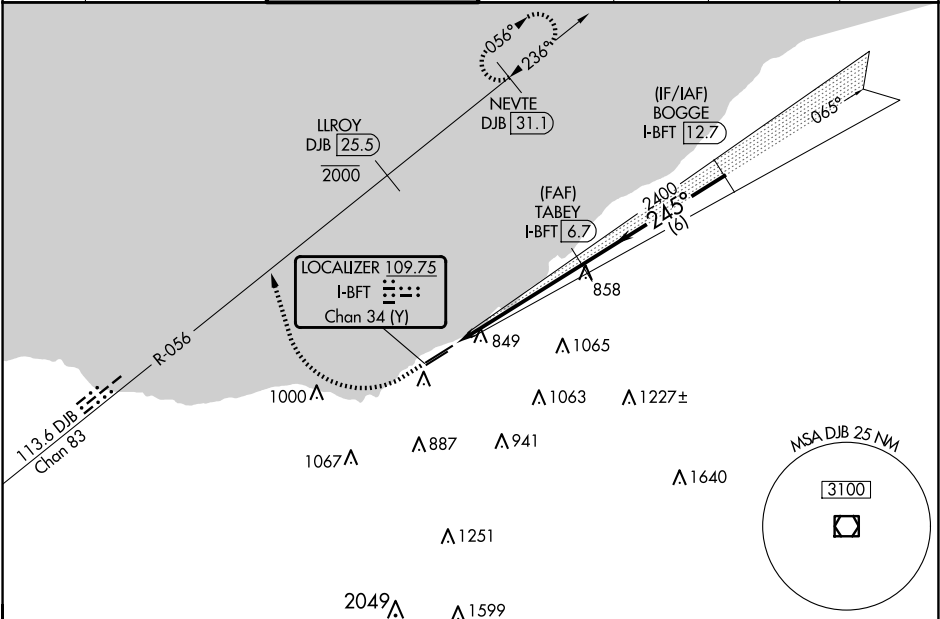

ELEV 584	D TDZE 24R 583 TDZE 24L 584	1120	↑ DJB R-056	LLROY DJB 25.5 2000	3000	NEVTE DJB 31.1
245° 6604 X 150 5197 X 100 TWR 649		↑ hdg 350°	TABEY I-BFT 6.7 BOGGE I-BFT 12.7 I-BFT 1.1 I-BFT 2.4 2400 2400 245° 2400 GS 3.00° TCH 42			
		1.4 NM	4.2 NM	6 NM		
CATEGORY	A		B		C	
S-ILS 24R	916-3/4 333 (400-3/4)					
S-LOC 24R	1060-3/4 477 (500-3/4)		1060-1 1/8 477 (500-1 1/8)			
SIDESTEP 24L	1060-1 476 (500-1)		1060-1 1/2 476 (500-1 1/2)		1060-2 476 (500-2)	
CIRCLING	1060-1 476 (500-1)		1140-1 1/2 556 (600-1 1/2)		1200-2 616 (700-2)	