


WAAS CH 69630 W05A	APP CRS 050°	Rwy Idg TDZE 3427 Apt Elev 3443
--	------------------------	---

RNAV (GPS) RWY 5
SHELBY (SBX)

RNP APCH - GPS.	MISSED APPROACH: Climb to 9000 direct YENUP and hold, continue climb-in-hold to 9000.
Baro-VNAV and VDP NA when using Cut Bank altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Cut Bank altimeter setting.	

AWOS-3PT 128.325	SALT LAKE CITY CENTER 133.4 285.4	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

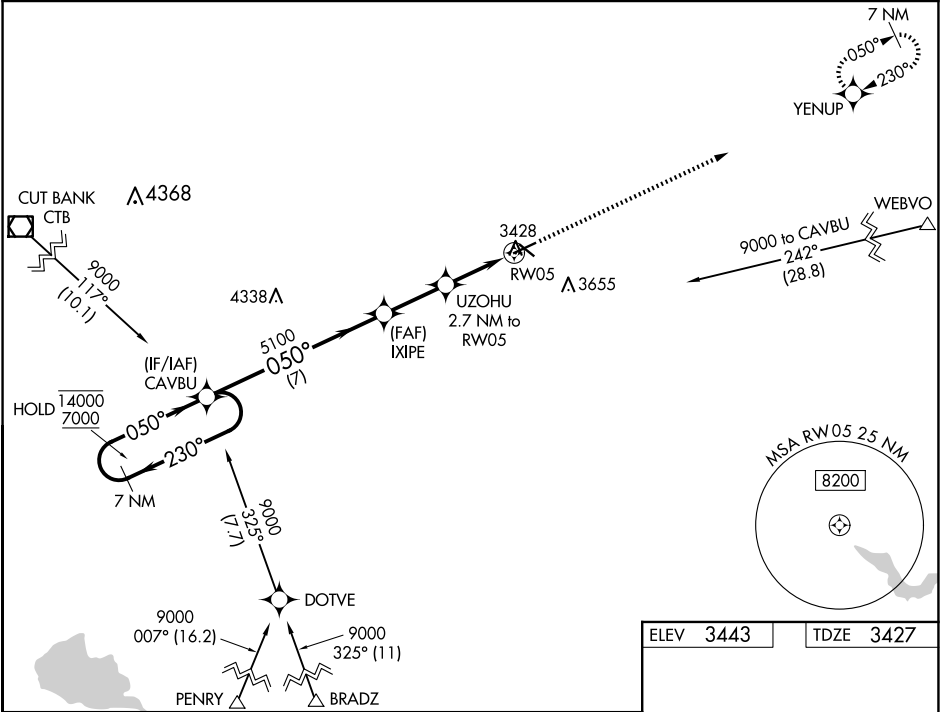

7 NM Holding Pattern		CAVBU		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).		9000		YENUP	
14000 7000		IXIPE		UZOHU		2.7 NM to RW05		1.1 NM to RW05	
GP 3.00° TCH 45		5100		4300		5100		RW05	
7 NM		2.4 NM		1.6 NM		1.1 NM			
CATEGORY	A	B	C	D					
LPV DA	3733-1		306 (300-1)						
LNAV/VNAV DA	3783-1		356 (400-1)						
LNAV MDA	3800-1		373 (400-1)						
CIRCLING	4020-1 577 (600-1)	4080-1 637 (700-1)	4100-1¾ 657 (700-1¾)	4220-2½ 777 (800-2½)					

MIRL Rwy 5-23 and 11-29

NW-1, 04 SEP 2025 to 02 OCT 2025

NW-1, 04 SEP 2025 to 02 OCT 2025